

## Start Flood Flat IP65 1000LM 840 White 0050108



### Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. White (RAL9003) housing, white reflector, 1000 lm, 9 W, 111 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 105 x 23 mm (L x W x H). Weight: 0.32kg.


### Product Overview

Product name	Start Flood Flat IP65 1000LM 840 White
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579545
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	White
IP rating	IP65

## Start Flood Flat IP65 1000LM 840 White 0050108

IK rating	IK06
Product EAN number	5410288501086
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	1000

### Photometry

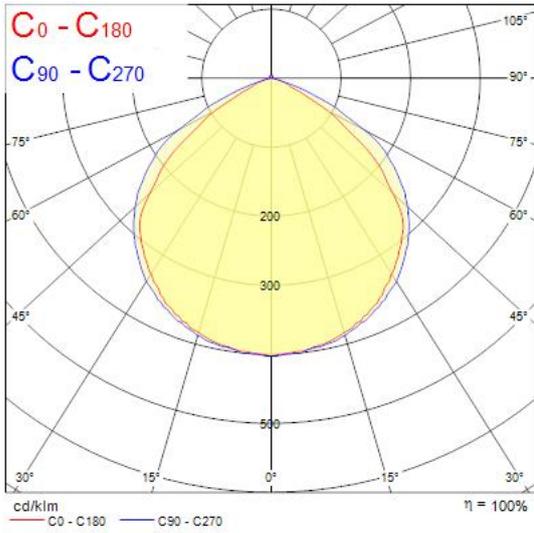

### Technical drawings

