



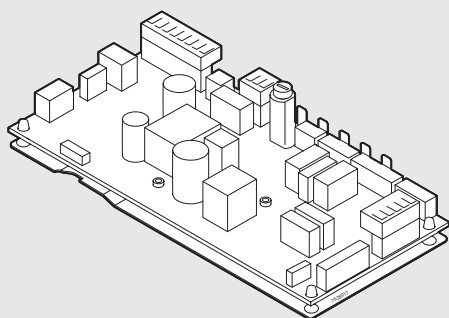


AD-1000338-01

Montage instructie
Assembly instructions
Instructions de montage
Montageanweisung
Instrucciones para el montaje
Istruzioni di montaggio

Besturingsautomaat
Control unit
L'unité de commande
Steuereinheit
Autómata de mando
Sistema di comando automatico

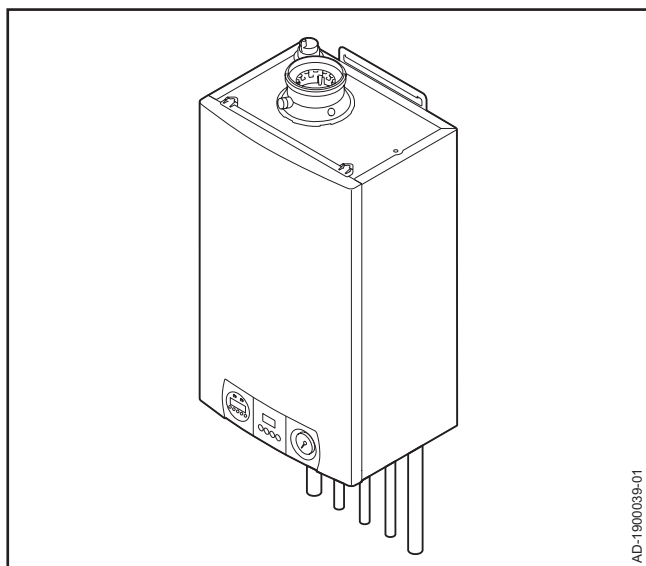


AD-1900039-01




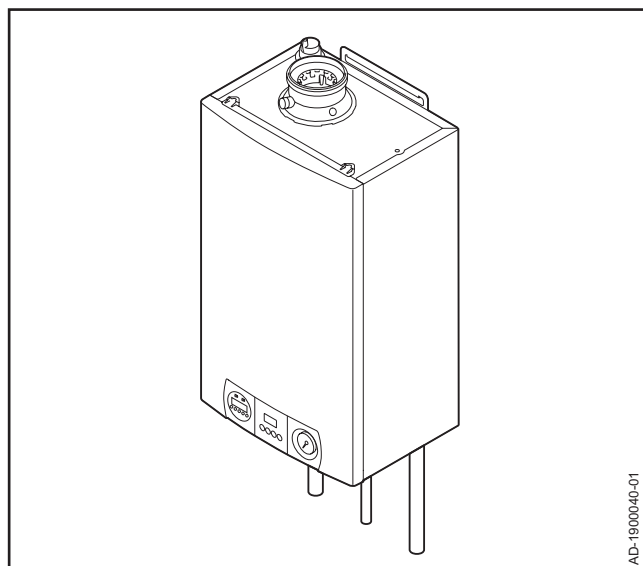



AD-1900040-01

Inhoud verpakking - Set contents - Contenu du kit
Inhalt des Bauatzes - Contenido del paquete - Contenuti del pacchetto

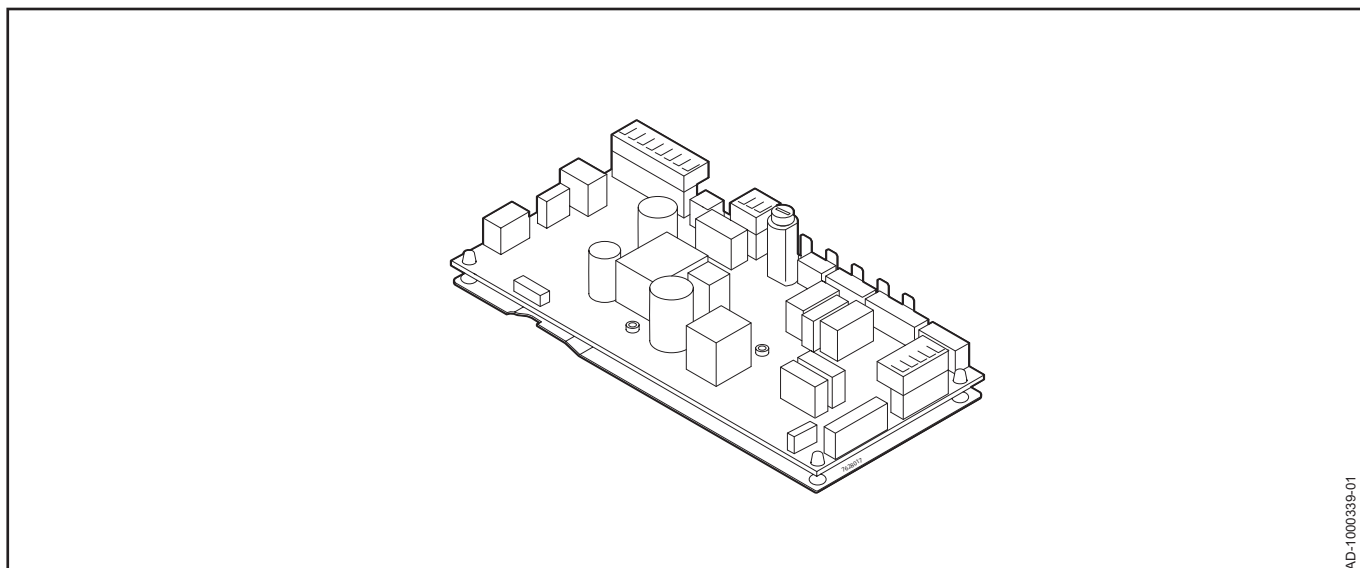


AD-1000339-01



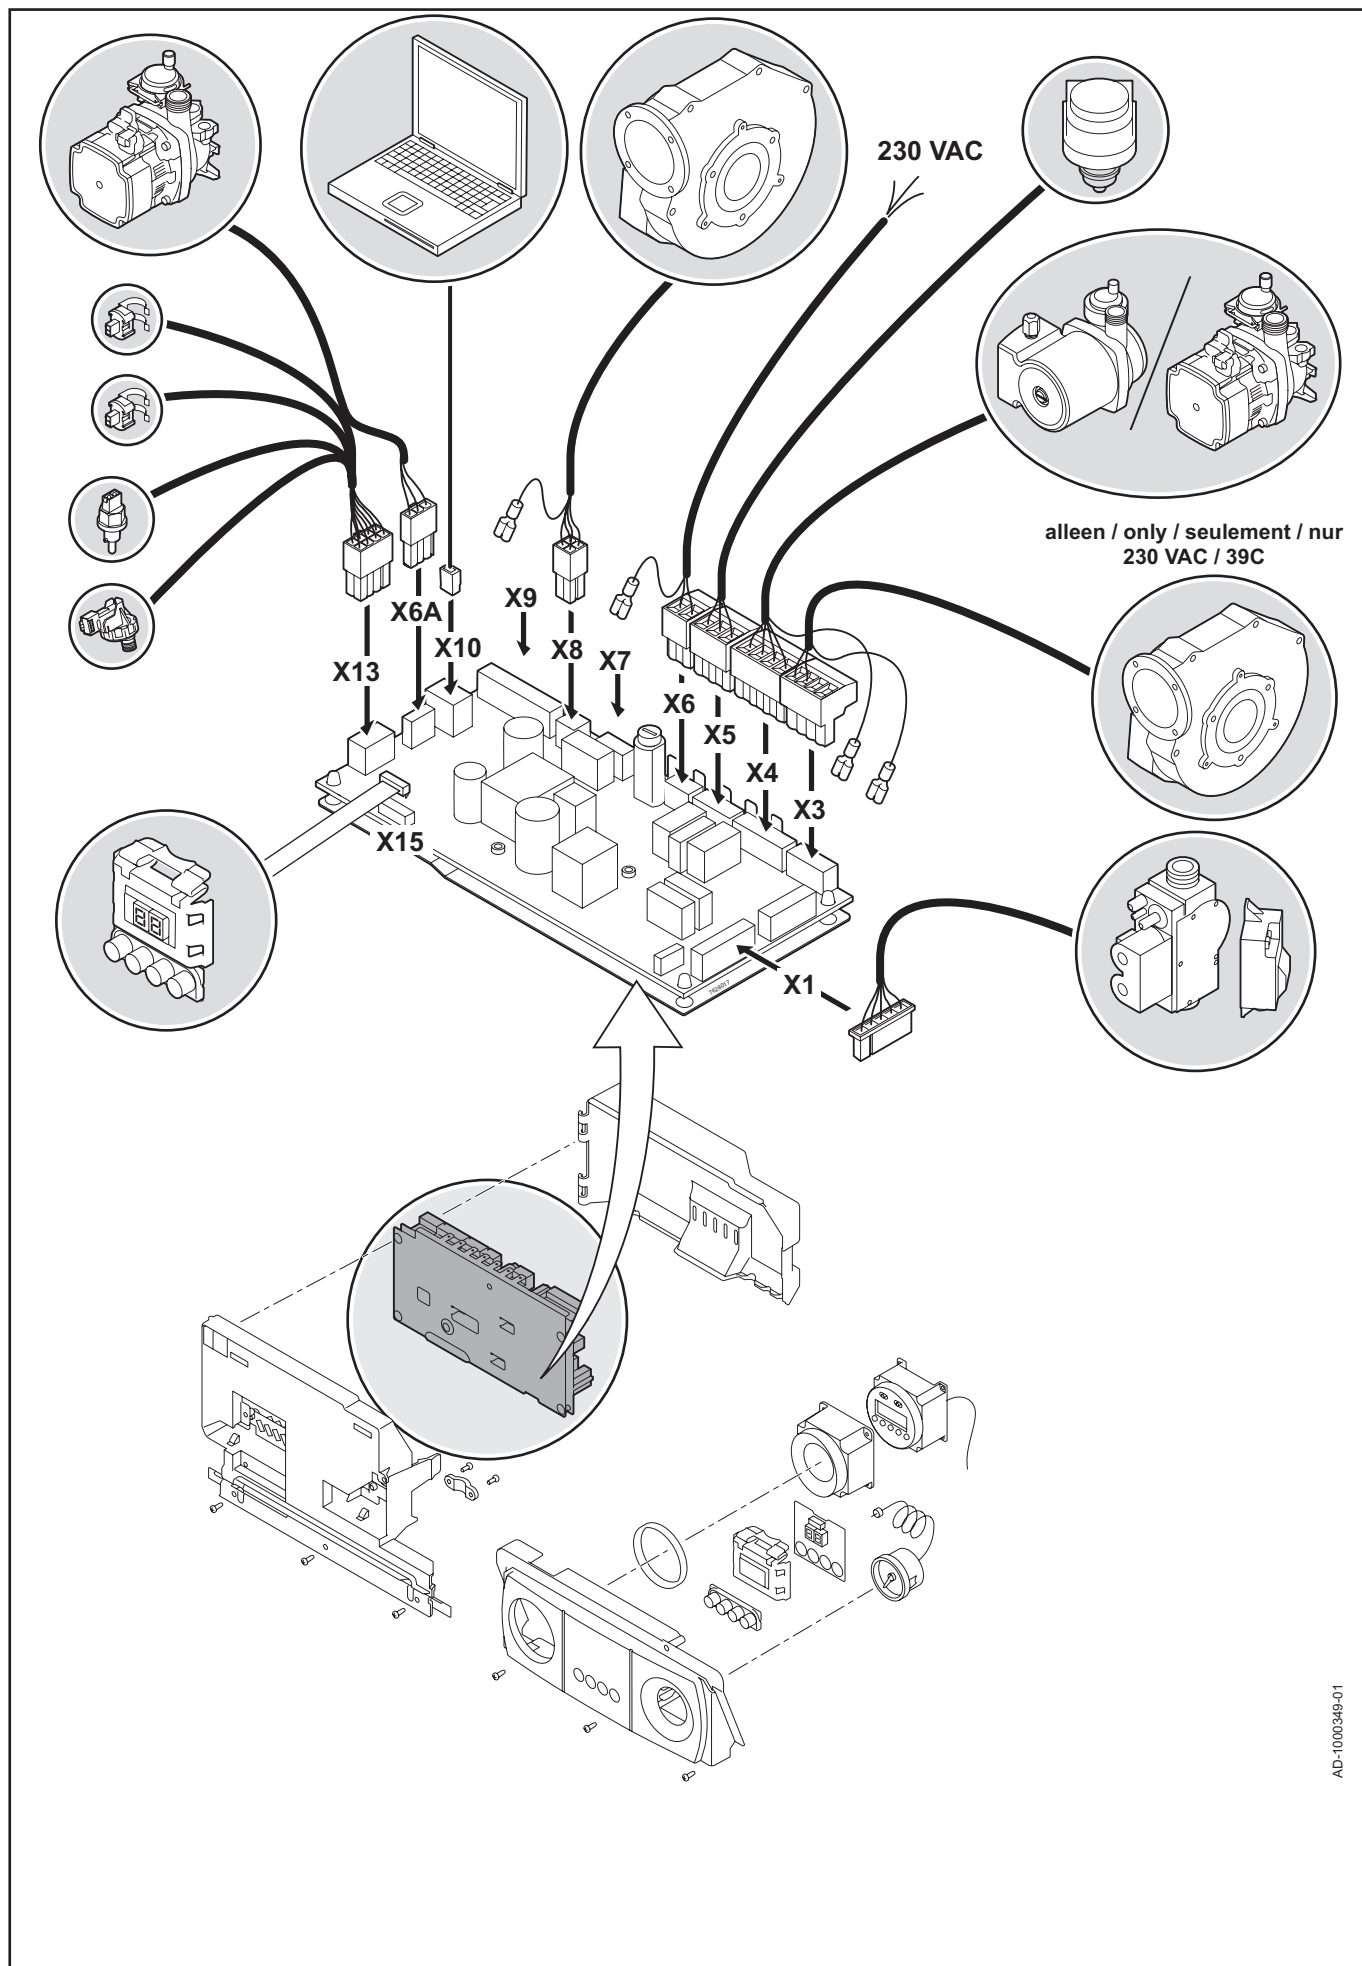


AD-1000349-01

1




AD-1000350-01

2

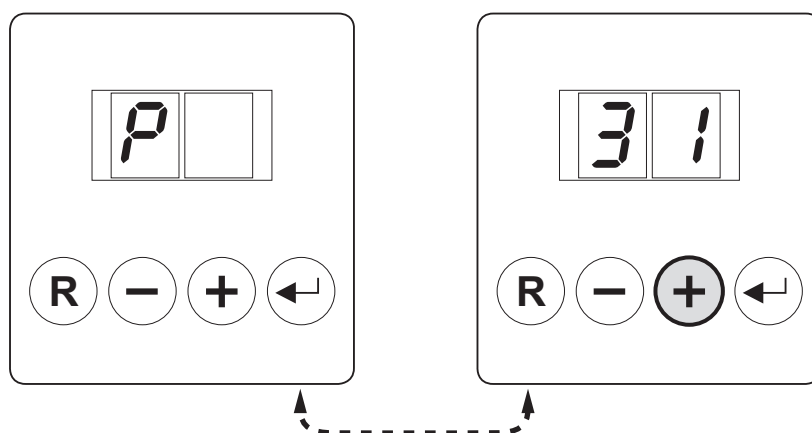

AD-1000351-01

3

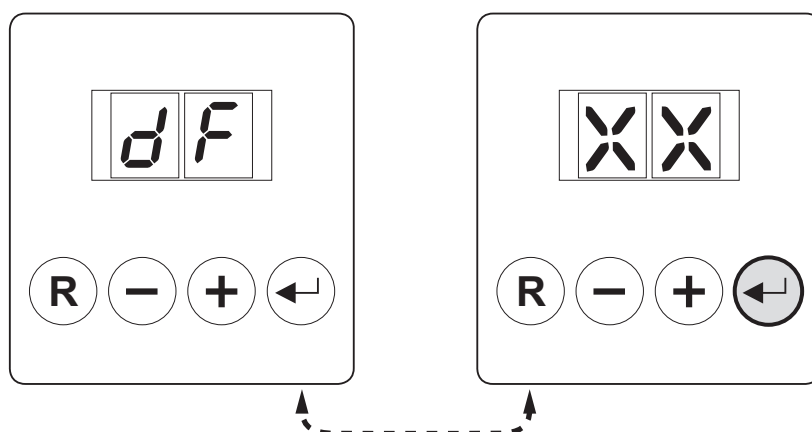

AD-1000352-01

4

The diagram shows a rectangular control panel. At the top, there are two square buttons, each containing a black 'X' symbol. Below these are four circular buttons arranged horizontally. From left to right, they contain the letters 'R', a minus sign '-', a plus sign '+', and a left-pointing arrow with a small square at its tail.

AD-1000353-01

The diagram illustrates the control interface and technical specifications for the Remeha B.V. Avanta Comfort boiler. The control interface consists of a digital display showing '01' and four buttons: 'R', a minus sign, a plus sign, and a return arrow. The technical specifications are provided in a table below the display.


Remeha B.V.	
Kanaal Zuid 110	
NL - 7532 RD Apeldoorn	
0003 - 05	
Avanta Comfort	
serie nr. 9991211245670	
Pn (BO/NO):	20.4 kW
Pn (DO/PO):	22.7 kW
On (N):	20.0 kW
PM:	3 bar
On:	20.0 kW
D (21) = 30 K:	19 Watts
Pmax:	8 bar
PM:	000BP0513
Nb:	BP05
230 V - 50Hz (P 20) 150 W	
B21,B23,G13,G33,C43,C53,	
C63,C65	

The technical specifications table includes the following details:

- Pn (BO/NO):** 20.4 kW
- Pn (DO/PO):** 22.7 kW
- On (N):** 20.0 kW
- PM:** 3 bar
- On:** 20.0 kW
- D (21) = 30 K:** 19 Watts
- Pmax:** 8 bar
- PM:** 000BP0513
- Nb:** BP05
- 230 V - 50Hz (P 20) 150 W**
- B21,B23,G13,G33,C43,C53, C63,C65**






The diagram also shows a callout for the **dF:1** parameter, which is indicated by a circle around the 'dF:1' text and a line pointing to the 'dF:1' label on the technical specifications table.

6

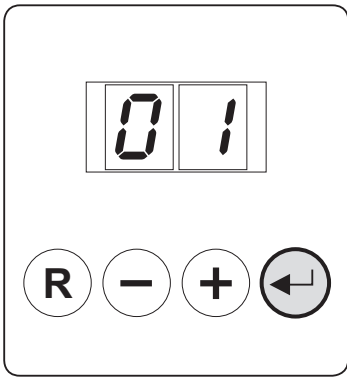

AD-1000355-01

7632871 - v.01 - 28052015

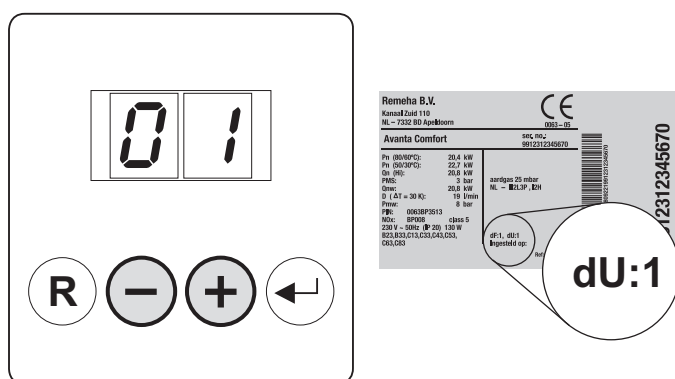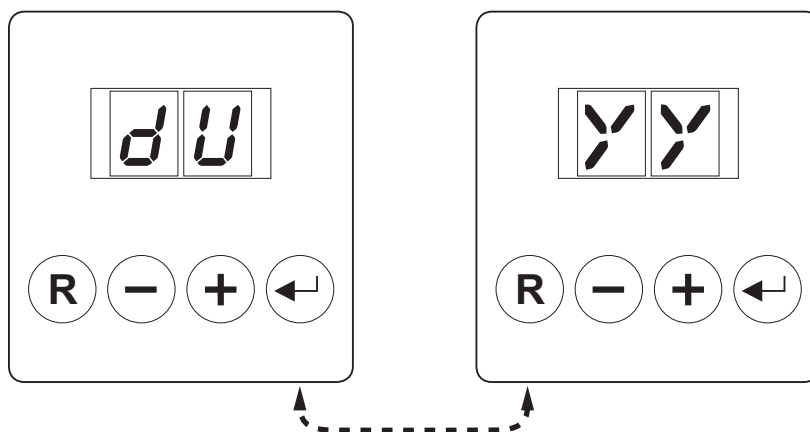

© Copyright

All technical and technological information contained in these technical instructions, as well as any drawings and technical descriptions supplied, remain our property and shall not be multiplied without our prior consent in writing.

Ours is a policy of continuous development. We reserve the right to alter specifications without prior notification.

Subject to alterations