

BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742



Features

• Integrated LED spotlight, black RAL 9005, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg.



Product Overview

Product name	BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4280890
Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Correlated colour temperature (k)	3000

BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742

Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Dimmable	Yes
Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597420
Warranty	5 years
Dimming method	Other


Photometry

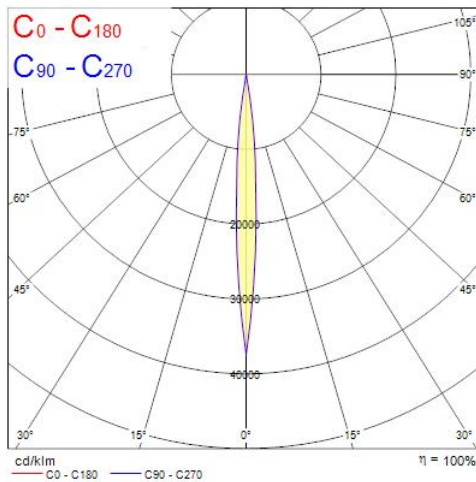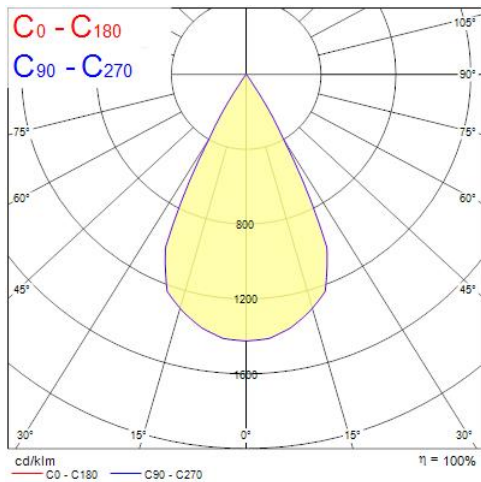


0.5	0.07	E(0°) E(C0)	4.0°	82823 41860
1.0	0.14	E(0°) E(C0)	4.0°	20706 10465
1.5	0.21	E(0°) E(C0)	4.0°	9203 4651
2.0	0.28	E(0°) E(C0)	4.0°	5176 2616
2.5	0.35	E(0°) E(C0)	4.0°	3313 1674
3.0	0.42	E(0°) E(C0)	4.0°	2301 1163

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 8.0°)

BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK
2059742

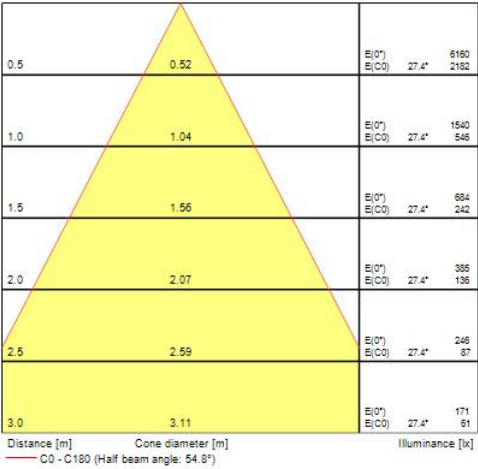

Technical drawings

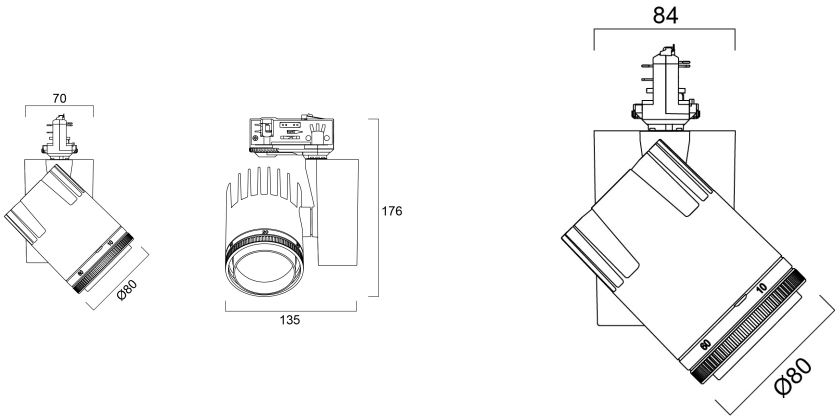

Data table

GENERAL DATA

Product name	BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK
Technology	LED
Cap/Base	N/A

BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742

Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280890
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Dimmable	Yes
Dimming method	Other
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50

BEACON LED MUSE II 97CRI 3000K L3 TRAILING EDGE BLACK 2059742

Max. products per 16A C Breaker	80
---------------------------------	----

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	47500

PHYSICAL DATA

Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	135
Nominal Product Height (mm)	176
Nominal Product Diameter (mm)	80

PACKAGING

Product EAN number	5025768597420
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768597420
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No