


Concord

Solstice 200 2300lm 930 SSA
2070158



Features

- The Solstice 200 2300lm 930 SSA is a high efficient SSA dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm. It can be used with external sensors -9041523 or 9041524.

Product Overview


Product name	Solstice 200 2300lm 930 SSA
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4262085
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	135
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel

Concord

Solstice 200 2300lm 930 SSA
2070158

IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701582
Warranty	5 years

Photometry

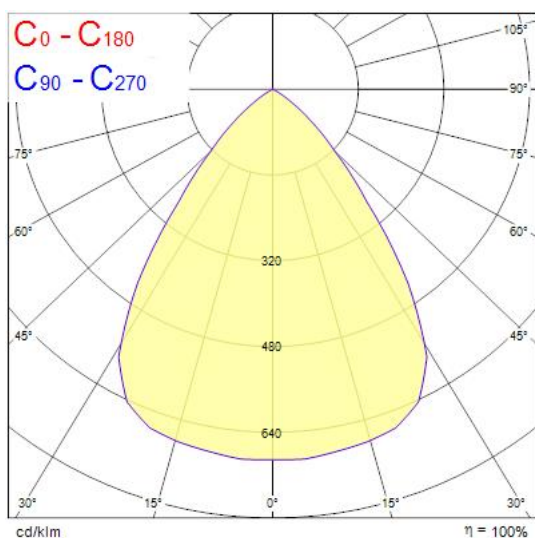

Technical drawings

