

# START Panel Flat UGR19 600x600

*START Panel Flat UGR19 600x600 840 SSH*  
0047040




## PRODUCT OVERVIEW

Product name	START Panel Flat UGR19 600x600 840 SSH
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
Warranty	5 years
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	32
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK06
Product EAN number	5410288470405

## PHOTOMETRY

## START Panel Flat UGR19 600x600

*START Panel Flat UGR19 600x600 840 SSH*  
**0047040**

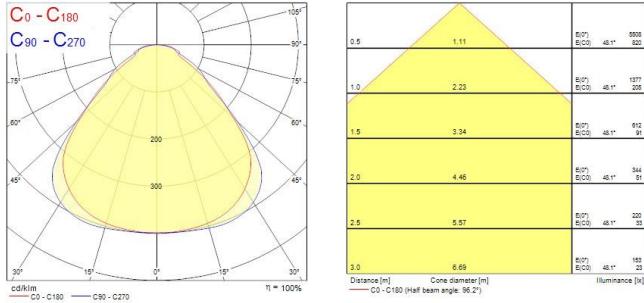

### TECHNICAL DRAWINGS

