

### Features

- Edge lit LED flat panel. SYLSMART Connected Building - Fully wireless, adaptive, dynamic smart system. 32 W, Neutral White, 4000 K, 3500 lumens, 109 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic driver. (HxWxD) 50 x 596 x 596 mm

### Product Overview

<b>Product name</b>	START Panel Flat UGR19 600x600 840 SSH
<b>Technology</b>	LED
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting, Ceiling surface mounting, Suspended
<b>Environment</b>	Interior
<b>Fixture luminous flux (lm)</b>	3500
<b>Luminaire efficacy (lm/W)</b>	109.3
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	32
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	White
<b>IP rating</b>	IP40/20

Light your world

## START Panel Flat UGR19 600x600 840 SSH 0047040

IK rating

IK06


Product EAN number

5410288470405


Warranty

5 years

### Photometry

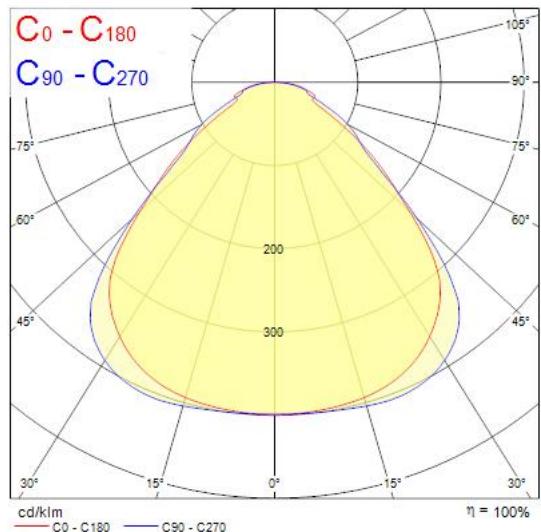

### Technical drawings

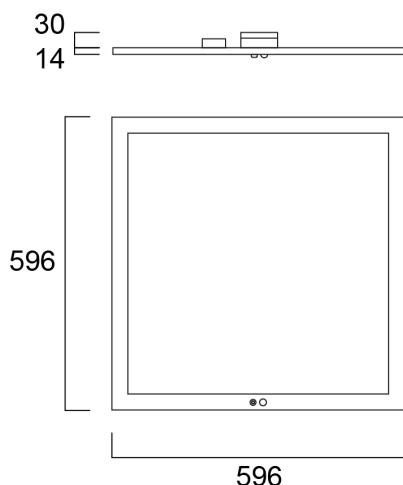

Light your world