

## Data Sheet | Item Number: 734-429


Strain relief plate; for female and male connectors; 75 mm wide; 1 part; Pin spacing 3.81 mm; orange

<https://www.wago.com/734-429>



Color: ■ orange

Similar to illustration

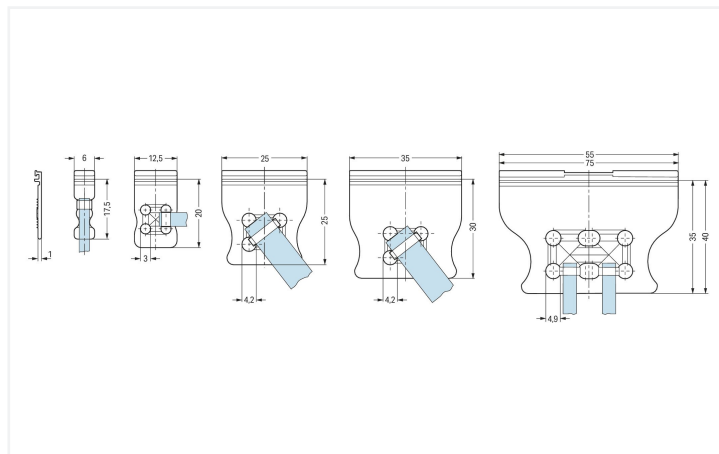

Dimensions in mm

The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

### Physical data

Width	75 mm / 2.953 inches
Height	1.87 mm / 0.074 inches
Depth	42 mm / 1.654 inches

### Mechanical data

Suitable	for standard male and female connectors (3.81 mm; 5.08 mm; 7.62 mm pin spacing)
----------	---

### Material data

Note (material data)	<a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a>
Color	orange
Fire load	0.139 MJ
Weight	4.6 g

### Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454643881
Customs tariff number	85389099990

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Approvals / Certificates

#### Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	96/20035 (E5)

### Downloads

#### Environmental Product Compliance


Compliance Search
Environmental Product Compliance 734-429 <a href="#">↓</a>

### Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	<a href="#">↓</a>

### Installation Notes

#### Installation



Strain relief plates for factory or in-the-field assembly

### Application



Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin spacing, light gray,  
12-pole, with strain relief plate  
733-112/034-000

## Application



Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
2-pole, with strain relief plate  
(733-102/032-000)