Data Sheet | Item Number: 734-431

Strain relief plate; for female and male connectors; 75 mm wide; 1 part; gray


https://www.wago.com/734-431







Color: gray

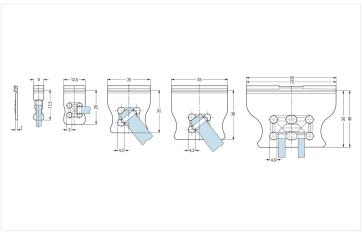

Dimensions in mm

The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

Physical data	
Width	75 mm / 2.953 inches
Height	1.87 mm / 0.074 inches
Depth	42 mm / 1.654 inches

Mechanical data Suitable for standard male and female connectors (2.5 mm; 3.5 mm; 7.5 mm pin spacing)

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	0.169 MJ
Weight	4.4 g

Data Sheet | Item Number: 734-431

https://www.wago.com/734-431



Commercial data	
Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454643898
Customs tariff number	85389099990

Environmental Product Compliance

RoHS Compliance Status Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval Standard Certificate Name

LR IEC 61984 96/20035 (E5)

Lloyds Register

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 734-431



Documentation Additional Information Bid Text Technical Section pdf 2010.85 KB 19.02.2019 xml 2.49 KB ⊥ 734-431 27.04.2017 doc 23.50 KB ⊥

Data Sheet | Item Number: 734-431

https://www.wago.com/734-431



Installation Notes

Installation



Strain relief plates for factory or in-the-field assembly

Application



Strain relief plate, for factory assembly 1-conductor female connector, 2.5 mm pin spacing, light gray, 12-pole, with strain relief plate 733-112/034-000

Application



Strain relief plate, for factory assembly 1-conductor female connector, 2.5 mm pin spacing, light gray, 2-pole, with strain relief plate (733-102/032-000)

Subject to changes. Please also observe the further product documentation!