# Technical data sheet

## US 3 support A4

## Item number: 6342491



U support in fixed lengths. Dimensions 30 x 50 mm.
For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.

CE UK CA US3

| | |
|---|---|
| A4 | Stainless steel |
| 2B | Bright, treated |

### Master data

| | |
|---|---|
| Item number | 6342491 |
| Type | US 3 100 A4 |
| Description 1 | U support |
| Description 2 | 3-sided perforated |
| Manufacturer | OBO |
| Dimension | 50x30x1000 |
| Colour | stainless steel |
| Material | Stainless steel 1.4571 |
| Surface<br>Surface standard | Bright, treated |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 132 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 7,9057 kg CO2e / 1 Piece |

# Technical data sheet

## US 3 support A4

## Item number: 6342491

### Dimensions

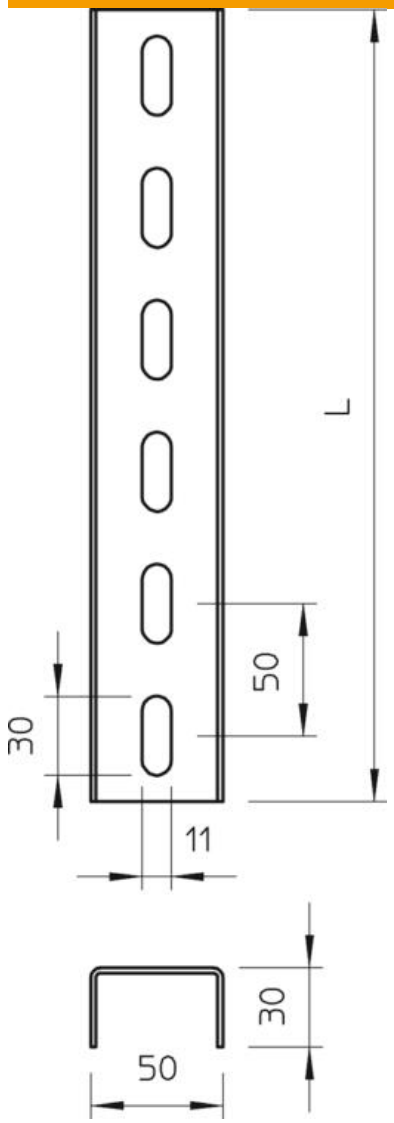


| | |
|---|---|
| Dimension | 30 x 50 x 2,0 |
| Length | 1,000 mm |
| Width | 50 mm |
| Height | 30 mm |

# Technical data sheet

## US 3 support A4

## Item number: 6342491

### Technical data

| | |
|---|---|
| Breakable | no |
| Type of perforation | 3 sides perforated |
| Version for | Single profile |
| Maintain electrical functions | no |
| Material thickness | 2 mm |
| With toothing | no |
| Profile shape | U profile |
| ROHS-conformant | yes |
| Static value A | 1.42 cm² |
| Static value Iy | 1.52 cm⁴ |
| Static value Iz | 5.72 cm⁴ |
| Static value Wy | 0.7 cm³ |
| Static value Wz | 2.29 cm³ |