

START Downlight 150 IP54 1250lm 840  
0030325



Features

• Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 45mm product depth and 150mm cutout. Ideal replacement for 1x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 12W, 4000K, Driver Current: 290mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 45x165mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 150 IP54 1250lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278146
Fixture luminous flux (lm)	1250
Luminaire efficacy (lm/W)	104
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25

**START Downlight 150 IP54 1250lm 840  
0030325**

Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303253
Warranty	5 years
Dimming method	N/A

## Photometry

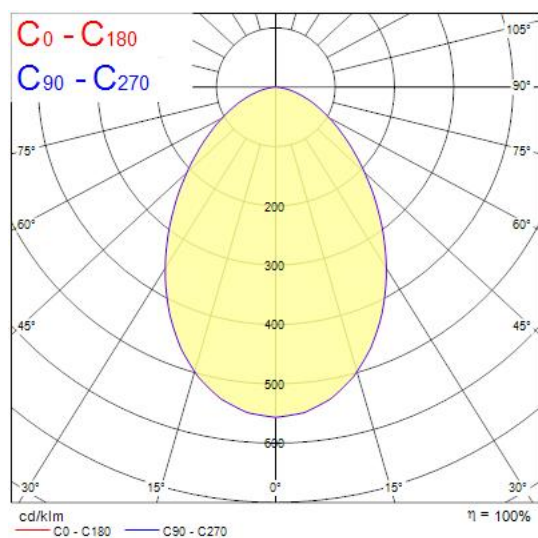

## Technical drawings

