

## START Surface Wall Cube IP54 2x140lm 2CCT Black 0047136




### Features

- Exterior adjustable surface wall up and down light luminaire, black aluminium - RAL9005, 280lm, 5.8W, 48lm/W, 3000/4000K switchable CCT, adjustable beam angle (0 - 94°), 104.000 hrs L70:B50 lifespan, CRI 80, SDCM<3, IP54, IK05, 1000 hrs salt spray test, -20 - +45°C operating temperature range, 108x108x108mm, Class I

### Product Overview

<b>Product name</b>	START Surface Wall Cube IP54 2x140lm 2CCT Black
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Wall surface mounted
<b>E-number FI</b>	4579605
<b>Fixture luminous flux (lm)</b>	280
<b>Luminaire efficacy (lm/W)</b>	48
<b>Light colour</b>	Warm White or Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	5.8
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Housing colour</b>	Black
<b>IP rating</b>	IP54
<b>IK rating</b>	IK05
<b>Product EAN number</b>	5410288471365
<b>Warranty</b>	5 years

### Photometry

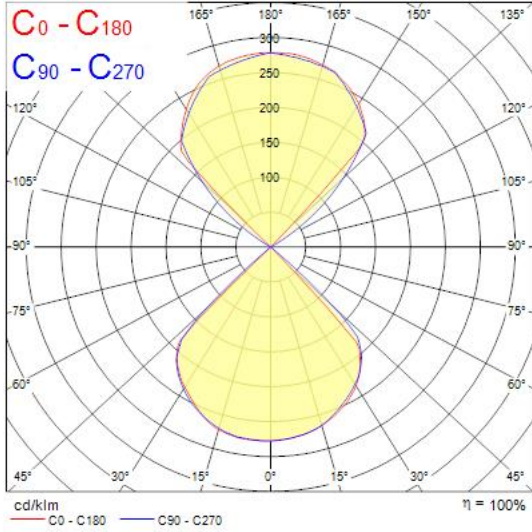

### Technical drawings

