


# Concord

Solstice 200 1900lm LUMI 940 SSC  
2070163



## Features

- The Solstice 200 1900lm LUMI 940 SSC is a high efficient SSC dimmable downlight luminaire, Colour rendering index Ra>96, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

## Product Overview


|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | Solstice 200 1900lm LUMI 940 SSC |
| Technology                      | LED                              |
| Cap/Base                        | N/A                              |
| Housing                         | Aluminium                        |
| Mount                           | Ceiling recessed mounting        |
| E-number FI                     | 4262090                          |
| Fixture luminous flux (lm)      | 1900                             |
| Luminaire efficacy (lm/W)       | 106                              |
| LOR (%)                         | 100                              |
| Colour temperature (K)          | 4000                             |
| Light colour                    | Neutral White                    |
| CRI (Ra)                        | 97                               |
| Colour Consistency (SDCM)       | 3                                |
| Colour Variation Initial (SDCM) | 3                                |
| Glare control                   | < 19                             |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 18                               |
| Electrical protection           | Class II                         |
| Control gear type               | LED driver constant current      |
| LED Flickering Rate             | Ultra low (5% or less)           |
| Housing colour                  | RAL 9016 - Traffic white / Bezel |

# Concord

Solstice 200 1900lm LUMI 940 SSC  
2070163

|                    |               |
|--------------------|---------------|
| IP rating          | IP40/20       |
| IK rating          | IK02          |
| Product EAN number | 5025768701636 |
| Warranty           | 5 years       |

## Photometry

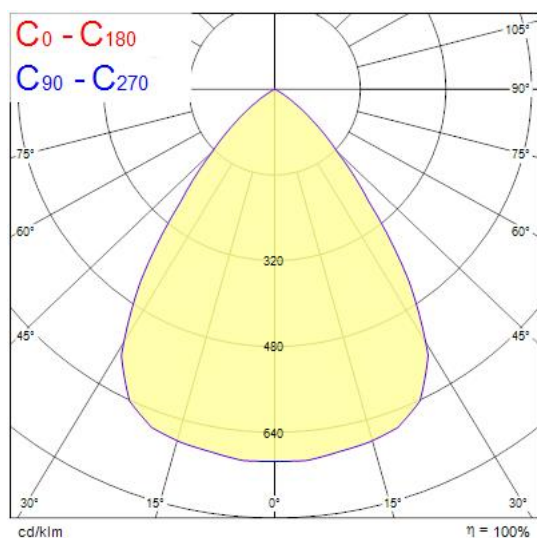

## Technical drawings

