

Muro Recessed Rectangular

Muro Recessed Rectangular IP66 420lm 830 Grey

2824202



Product features

- Recessed wall luminaire comes complete with recessing box and 30cm flying lead, aluminium housing in RAL7016 Anthracite grey colour, glass diffuser, IP66, IK08, Class I, 3000K, non-dimmable, 420lm, 9.5W, 44 lm/W, CRI80, Asymmetrical beam, 90000 hrs L80B20 lifespan, 275 x 125 x 120 mm (L x W x D) dimensions, 1.7 kg weight.



PRODUCT OVERVIEW

Product name	Muro Recessed Rectangular IP66 420lm 830 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
E-number FI	4579266
Warranty	5 years
Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	44
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0
Total power consumption (W)	9.5
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	RAL 7016 - Anthracite
IP rating	IP66
IK rating	IK08
Product EAN number	5025768242023

DATA TABLE

General data	
Product name	Muro Recessed Rectangular IP66 420lm 830 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	-20°C...+45°C

Muro Recessed Rectangular

Muro Recessed Rectangular IP66 420lm 830 Grey
2824202

Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579266
Warranty	5 years

Optical data

Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	44
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	9.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	60
Electrical protection	Class I
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	20
Inrush Duration (µs)	220
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	47
Max. products per 13A C Breaker	57
Max. products per 16A C Breaker	69
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	37
Max. products per 13A B Breaker	46
Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	64

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	58900

Muro Recessed Rectangular

Muro Recessed Rectangular IP66 420lm 830 Grey
2824202

Physical data

Housing colour	RAL 7016 - Anthracite
IP rating	IP66
IK rating	IK08
Diffuser finish	Other
Diffuser material	Glass
Nominal Product Length (mm)	275
Nominal Product Width (mm)	125
Nominal Product Height (mm)	120
Weight (kg)	1.7


Packaging

Single packaging type	Carton
Product EAN number	5025768242023
Packaging single length / height (cm)	19.0
Packaging single width (cm)	16.5
Packaging single depth (cm)	32.0
DUN14 (outer)	15025768242020
Units per outer package	4
Packaging outer length / height (cm)	40.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	34.0

Safety data

Optimal operating condition (°C)	-20-45
----------------------------------	--------

PHOTOMETRY

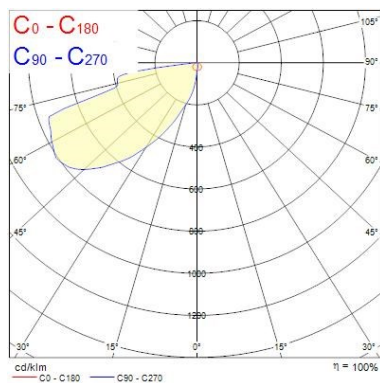

TECHNICAL DRAWINGS

Muro Recessed Rectangular

Muro Recessed Rectangular IP66 420lm 830 Grey

2824202

