

Features

• Equinox LUMI HCL TW is an elegant and innovative luminaire designed using the latest optical technology and Tunable White Human Centric Lighting (2700-6500K) Lumi LED chips (Colour rendering index Ra >97);. It is a high quality and efficient lighting solution for office, hospitality, and retail environments. It creates inspirational halo effects regulated by a unique adjustable optic system. It is Sylsmart dimmable downlight luminaire, For 4000K - Colour rendering index Ra >97; Melanopic Ratio MEER 0.866; Fidelity Index R# 95; Gamut Index R# 102, Class II, Cut out dimensions: 165mm. Low Glare UGR<19. Finish Jet Black RAL 9005.


Product Overview

Product name	EQUINOX 165 1925 LUMI HCL TW SSC01D BLACK
Technology	LED LumiNature
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Office
ETIM Class	EC001744
Fixture luminous flux (lm)	1925
Luminaire efficacy (lm/W)	77
Correlated colour temperature (k)	4000
Light colour	Tuneable White HCL
CRI (Ra)	97
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	64
Glare control	< 19

EQUINOX 165 1925 LUMI HCL TW SSC01D BLACK 2059961

Photobiological Risk Group	RG1
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	5025768599615
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

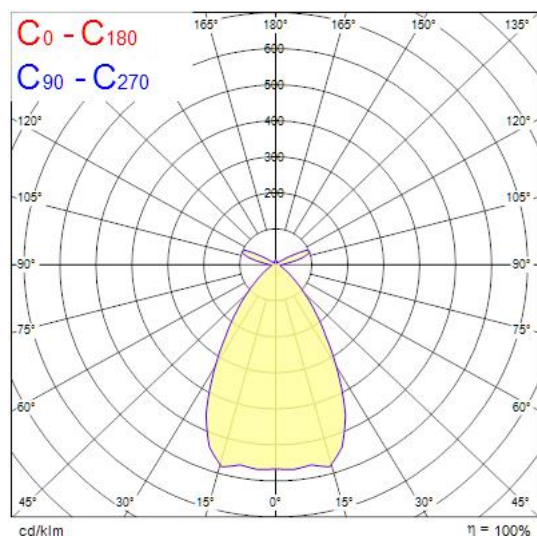

Technical drawings

