

Features

- START Downlight 5in1 65-260 2600LM PIR is an integrated LED recessed / surface mounted downlight with built in non dimmable driver and PIR sensor. PIR sensor with time settings (3 min max) and adjustable daylight lux level. 2 options for lumen output 1400lm or 2600lm. Colour temperature (3000K, 4000K and 6500K) can be chosen by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 260mm


Product Overview

Product name	START Downlight 5in1 65-260 2600LM PIR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
General application	Hospitality, Retail, Residential & Consumer
ETIM Class	EC001744
E-number FI	4279679
Fixture luminous flux (lm)	2600
Luminaire efficacy (lm/W)	113
Light colour	Warm White or Neutral White or Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

START Downlight 5in1 65-260 2600LM PIR 0053133

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288531335
Warranty	3 years
Built in presence detector	PIR
Virtual assistant compatibility	N/A
Dimming method	N/A

Photometry

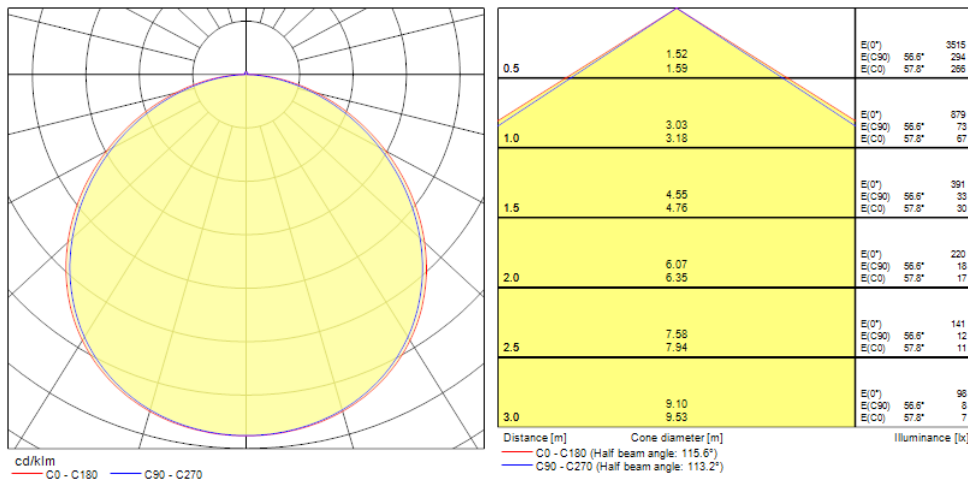

Data table

GENERAL DATA

Product name	START Downlight 5in1 65-260 2600LM PIR
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
Built in presence detector	PIR
General application	Hospitality, Retail, Residential & Consumer

START Downlight 5in1 65-260 2600LM PIR 0053133

Operating temperature range (°C)	5°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4279679
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	2600
Luminaire efficacy (lm/W)	113
Light colour	Warm White or Neutral White or Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	23
Supply current (A)	0.1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	30.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Inrush Current (A)	10.4
Inrush Duration (µs)	82
Energy Efficiency Class (A->G) of contained light source	D

START Downlight 5in1 65-260 2600LM PIR 0053133

Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	83
Max. products per 16A C Breaker	134
Max. products per 16A B Breaker	80
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L80 B10	73000
Lifespan L90 B50	47000
Lifespan L90 B10	36000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Reflector finish	Not Applicable
Nominal Product Height (mm)	22
Nominal Product Diameter (mm)	300
Weight (kg)	0.727

PACKAGING

Product EAN number	5410288531335
Packaging single length / height (cm)	6.0
Packaging single width (cm)	31.5
Packaging single depth (cm)	30.5
DUN14 (inner)	15410288531332
Units per outer package	8

START Downlight 5in1 65-260 2600LM PIR 0053133

Packaging outer length / height (cm)	33.0
Packaging outer width (cm)	44.7
Packaging outer depth (cm)	33.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No