

Wall mounted receptacle

Part number: 7102



MENNEKES
Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1
57399 Kirchhundem
GERMANY

www.MENNEKES.org

Product Description

- X-CONTACT
- internal fixing
- 20° inclination

Technical Details

Wall mounted receptacle - Part No. 7102	7102
Ampere	63A
Number of poles	5p
Clock position	6h
Nominal voltage AC	400V
Nominal frequency	50 - 60 Hz
Protection type IP	IP44
Contact carrier	standard
X-CONTACT	yes
Screw drive external screws	slot
Pilot contact	without pilot contact
Pilot contact switch	no
DIN rail	yes
Inspection window	yes
Cable entry at the top	1 x M40
Cable entry at the bottom	2 x M40
Enclosure base can be turned 180°	no
Insertion direction	angled
Inclination	20°
Type of mounting	internal fixing
Highly resistant to chemicals	no
LED voltage indicator	no
Conductor cross-section min.	6 mm ²
Conductor cross-section max.	25 mm ²
Weight (net)	2114 g
Packaging unit	3 pcs
Quantity per pallet	75 pcs

Wall mounted receptacle - Part No. 7102	7102
EAN / identification number	4015394033493

Permissible ambient conditions		
	Min.	Max.
Permissible ambient temperature	-25 °C	40 °C
Average temperature over 24 hours		35 °C


Material properties	
Base	PC light grey [similar RAL 7035]
Upper part	PC light grey [similar RAL 7035]
Hinged lid	PC red [similar RAL 3013]
External screws	PA6 light grey [similar RAL 7035]

Material resistance
The material resistance overview can be found on the website in the section "Knowledge" - "Product knowledge" - "Materials".

Material and environmental properties	
RoHS 2011/65/EU inkl. 2015/863/EU	✓
POP regulation (EU) 2019/1021	✓
Halogen-free	no

Regulations and Standards	
Norm	DIN EN IEC 60309-2
Declaration of Conformity	CE
Test label	EAC, CQC

Dimensional Drawing

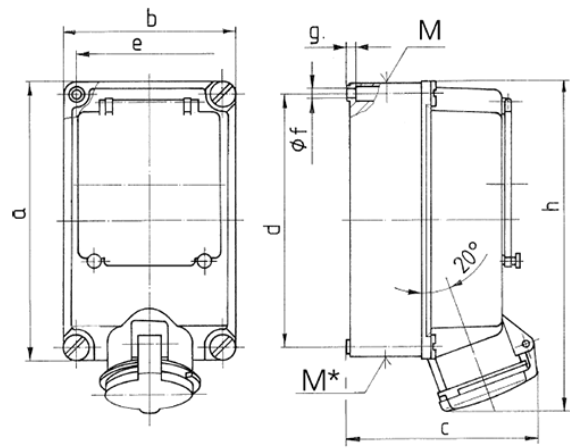

Drawing 1 MB 379	Amp. Poles	63	
		4	5
Dim. in mm	a	264	264
	b	163	163
	c	187	187
	d	240	240
	e	140	140
	f	8.1	8.1
	g.	8	8
	h	315	315
	M	1x40	1x40
Max. cable diam. (mm)	M*	2x40	2x40
		27	27