


START Panel Flat UGR19 600x600 3500Lm 840
0047227

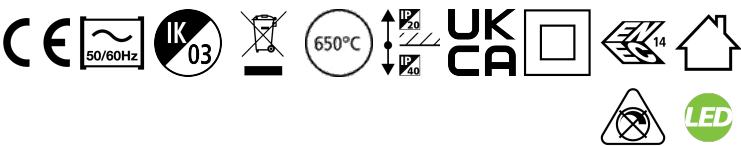

Features

- Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 35 W, Neutral White, 4000 K, 3500 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 9.5 x 595 x 595 mm


Product Overview

Product name	START Panel Flat UGR19 600x600 3500Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
E-number FI	4276948
Fixture luminous flux (lm)	3, 500
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03

START Panel Flat UGR19 600x600 3500Lm 840
0047227

Product EAN number	5410288472270
Warranty	5 years

Photometry

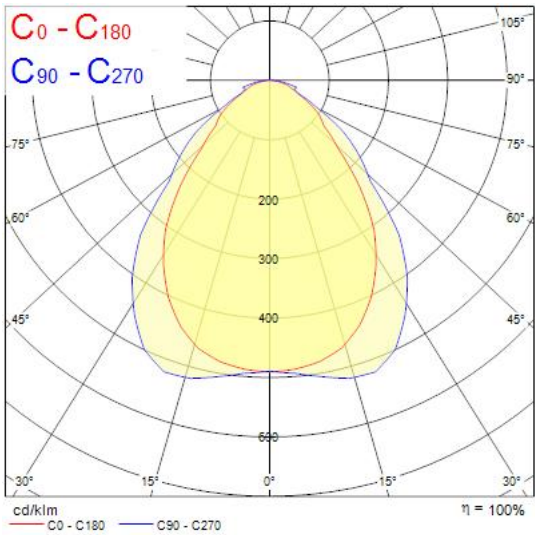

Technical drawings

