


L1-CI44

Devices, hole no. and size of the screws for the devices (M...x...); screwhead shape DIN 7985; spring washer DIN 137A
 Gerät, Loch-Nr. und Schraubengröße des Gerätes (M...x...); Kopfform DIN 7985; Federscheibe DIN 137A
 Appareils, no. des trous en taille des vis pour les appareils (M...x...); forme de tête DIN 7985; rondelle élastique DIN 137A

Typ

	DIL2(A)M	SDAINL2(A)M	DIL2-22	DIL3-22	DIL4-22	DIL6-22	DIL8-22	TC-RMO	Z4	ZW6	ZR720	Dd+Kdc+BT450/1	K25/1	K50/1	K95/1N	K150/1	K240/1	DIUL3M	SDAINL3M	DIUL4M	
	M5 x 16	M5 x 12	M5 x 20					M4 x 16	M5 x 20	M4 x 8	M4 x 16	M5 x 9	M5 x 12		M6 x 16			M5 x 12			
SDAINL2(A)M/I		2						3				6									
DIUL3-22(/Z4)/I				14,				34, 35, 36	16				10								
UPIIL3-22(Z4/Z4)				15				3, 4, 5	16, 19												
SDAINL3-22(/Z4)	9		22	20, 21				3	18		32										
DIL4-22/I					17									10,							
DIL4-22/Z4/I					12			3	13					30							
DIL4-22/P1/I															33						
DIL4-22/G/I						17								10, 30							
DIUL4-22(/Z4)/I								3, 4, 5													
SDAINL4-22(/Z4)/I				21		17		3	18		32										
DIL6-22						28										10,					
DIL6-22/Z4/I						26		3	25						30						
DIL6-22/G/I						28															
DIL6-22/P1/I						26												33			
DIUL6-22(/Z4)/I						28		3, 4, 5	18					10, 30							
SDAINL6-22(/Z4)/I					17	26, 28		3	25		32				33						
DIL8-22(/Z4)/I								3	25												
DIL8-22(/ZW6)/I							24			27					33						
DIL8-22/G/I																					
DIL8-22/P1/I																	33				
DIUL8-22(/Z...)/I						24		3, 4, 5							33						
SDAINL8-22(/Z...)/I					28	24, 29		3	25	27	32					33					
DIUL3M/11/I								3, 4, 5					30						41		
SDAINL3M/I																			40		
DIUL4(A)M/11/I								3, 4, 5													42

Kernlochdurchmesser für
metrisches Gewinde DIN 13

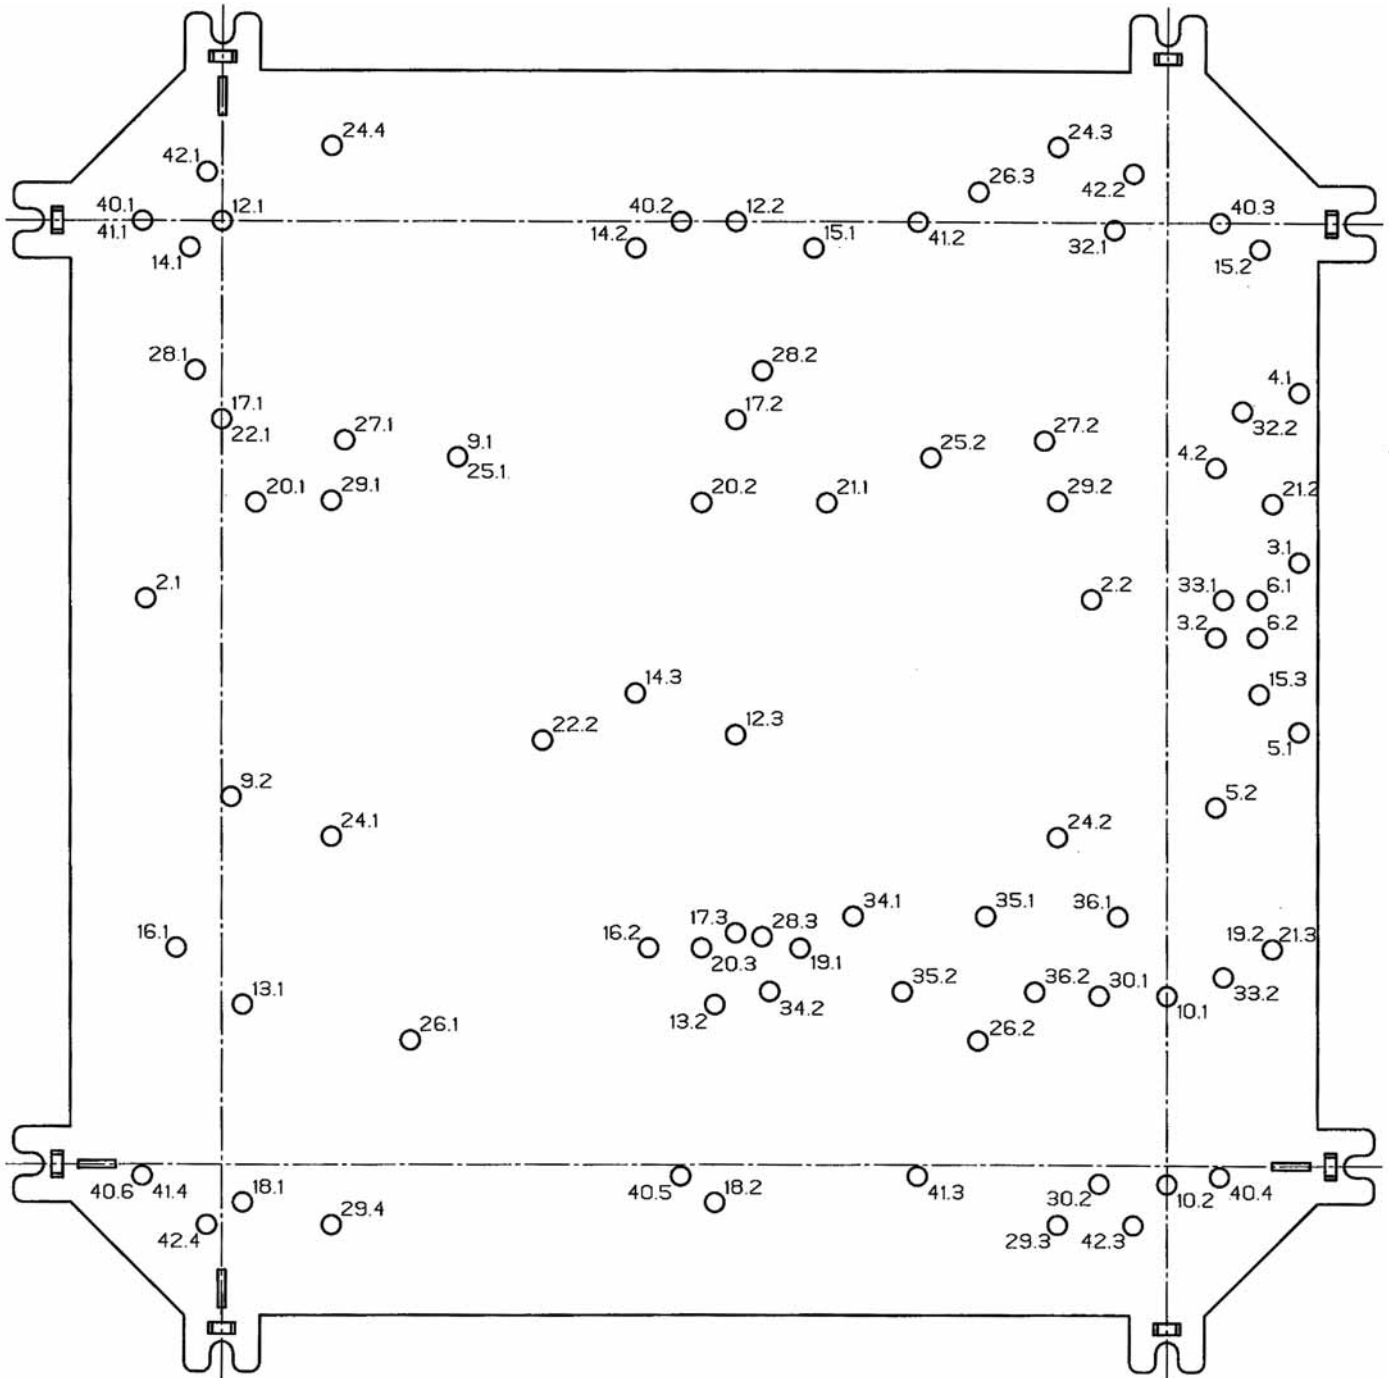

06/93 AWA461-766