



Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life


Product Overview

Product name	ToLEDo CANDLE 470LM 865 E14 SL
Technology	LED
Lamp shape	Candle
Cap/Base	E14
Lamp finish	Opal
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
E-number FI	4741293
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	240
Photobiological Risk Group	RG1
Wattage (W)	4.2
Power consumption (W)	4.2
Control gear type	LED driver constant current

ToLEDo CANDLE 470LM 865 E14 SL 0030887

Dimmable	No
Housing colour	White
IP rating	IP20
Product EAN number	5410288308876
Warranty	3 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	N/A
Useful luminous flux (#use)	470

Technical drawings

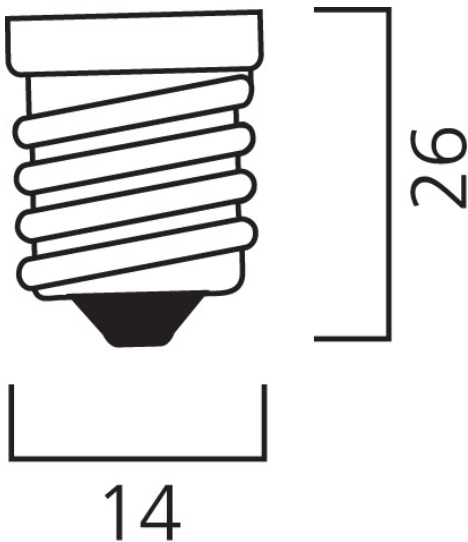

Data table

GENERAL DATA

Product name	ToLEDo CANDLE 470LM 865 E14 SL
Technology	LED
Lamp shape	Candle
Cap/Base	E14
Lamp finish	Opal

ToLEDo CANDLE 470LM 865 E14 SL 0030887

Built in presence detector	NONE
Fixture rating	Open
General application	Residential & Consumer
Virtual assistant compatibility	N/A
ETIM Class	EC001959
E-number FI	4741293
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	470
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	240
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	4.2
Wattage (W)	4.2
Equivalent watt (W)	40
Supply current (A)	0.04
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	5.5
Inrush Duration (µs)	125
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

PHYSICAL DATA

Housing colour	White
IP rating	IP20
Nominal Product Height (mm)	102
Nominal Product Diameter (mm)	35
Weight (kg)	0.016

PACKAGING

Product EAN number	5410288308876
Packaging single length / height (cm)	4.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	11.0
DUN14 (inner)	15410288308873
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	12.2

SAFETY DATA

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

SYLVANIA

ToLEDo CANDLE 470LM 865 E14 SL
0030887

Energy label



0030887



5
kWh/1000h



2019/2015



0030887



5
kWh/1000h



2019/2015

Light your world