

Features

- Ceiling rose incl 2m 5-pin power cable for OTAO on-off and DALI luminaires. RAL9003 (white) finishing.




Product Overview

Product name	OTAO LINEAR CEILING ROSE WH 5-PIN
Technology	LED (3 SDCM)
Housing	Steel
Mount	Suspended
General application	Office, Education
ETIM Class	EC002557
E-number FI	4170611
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Electrical protection	Class III
Housing colour	RAL 9003 - Signal white
IP rating	OTHER
IK rating	IK03
Product EAN number	5410288418186
Warranty	5 years

OTAO LINEAR CEILING ROSE WH 5-PIN 0041818

Technical drawings

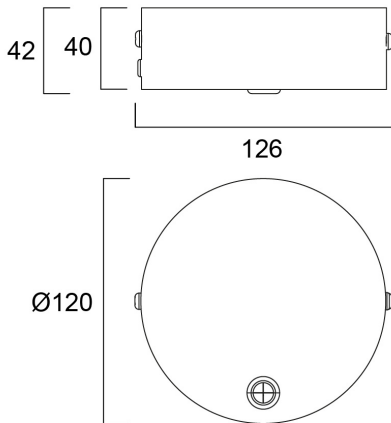

Data table

GENERAL DATA

Product name	OTAO LINEAR CEILING ROSE WH 5-PIN
Technology	LED (3 SDCM)
Type of accessory	Ceiling cup
Housing	Steel
Mount	Suspended
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC002557
E-number FI	4170611
Warranty	5 years

OPTICAL DATA

Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable

OTAO LINEAR CEILING ROSE WH 5-PIN 0041818

ELECTRICAL DATA

Electrical protection	Class III
Control gear required	No

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	OTHER
IK rating	IK03
Diffuser finish	Other
Nominal Product Diameter (mm)	120
Weight (kg)	0.3

PACKAGING

Product EAN number	5410288418186
Packaging single length / height (cm)	13.9
Packaging single width (cm)	12.3
Packaging single depth (cm)	8.8
DUN14 (inner)	15410288418183
Units per outer package	20
Packaging outer length / height (cm)	64.3
Packaging outer width (cm)	29.7
Packaging outer depth (cm)	19.4

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No