


MYRIAD IP65 4000K PHASE DIM WHITE

Item No: 2049529


Concord

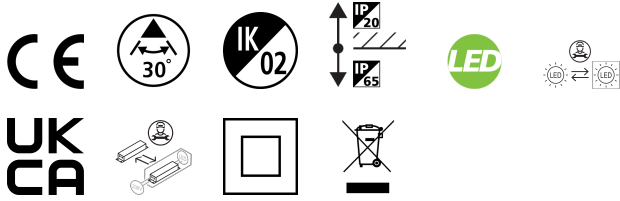

MYRIAD IP65 4000K PHASE DIM WHITE

Technical Assets


Dimensions (mm)

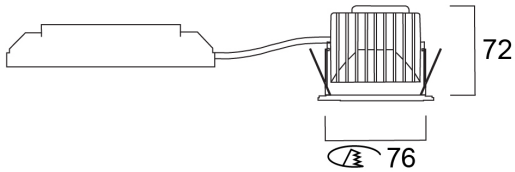

Photometrics

Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{19.8°} [lx]	Illuminance [lx]
0.5	0.36	6336	2643	
1.0	0.71	1677	661	
1.5	1.07	701	284	
2.0	1.42	394	155	
2.5	1.78	252	100	
3.0	2.14	175	73	

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 39.2°)

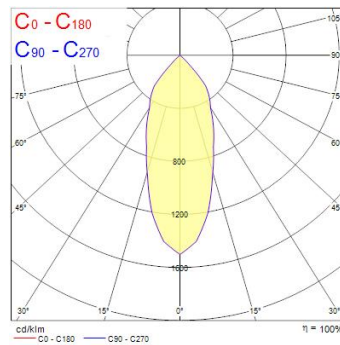

MYRIAD IP65 4000K PHASE DIM WHITE

Item No: 2049529

Concord

General data

Product name	MYRIAD IP65 4000K PHASE DIM WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462014
E-number Norway	3290237
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	1050
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Product EAN number	5025768495290
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5