


Flex Pro IP20 2500lm 940

Item No: 0068169




PRO

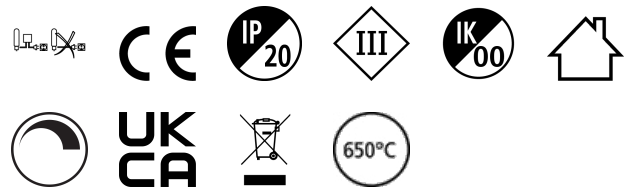


5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2500lm per 5m (500lm per 1m); 24V; 4000K; CRI90; R9>50; SDCM≤3;Compatible with emergency packs: 0046600, 0046601

Technical Assets

Dimensions (mm)

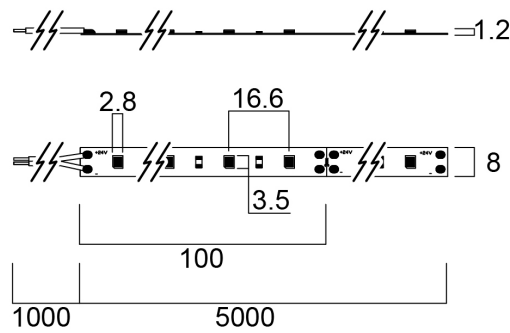

Photometrics

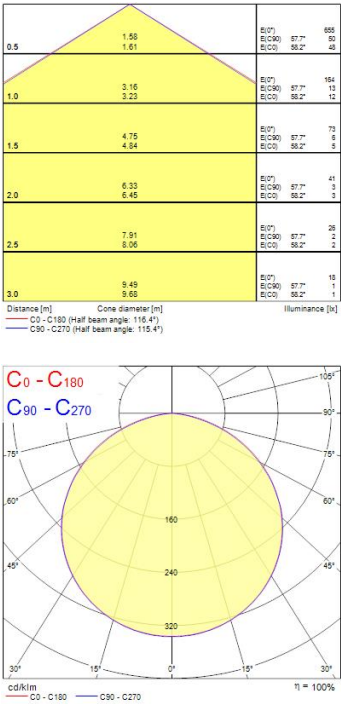

Flex Pro IP20 2500lm 940

Item No: 0068169



General data

Product name	Flex Pro IP20 2500lm 940
Technology	LED
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4278332
Warranty	5 years

Optical data

Useful luminous flux (Φuse)	2500
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	104
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1

Electrical data

Power consumption (W)	24
Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	1000
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	54000
------------------	-------

Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	8
Nominal Product Height (mm)	1.2
Weight (kg)	0.1

Packaging

Product EAN number	5410288681696
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681693
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40