


Flex Pro Low Output
Flex Pro IP20 2450lm 930
0068168



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2450lm per 5m (490lm per 1m); 24V; 3000K; CRI90; R9>50; SDCM 3, Compatible with emergency packs: 0046600, 0046601

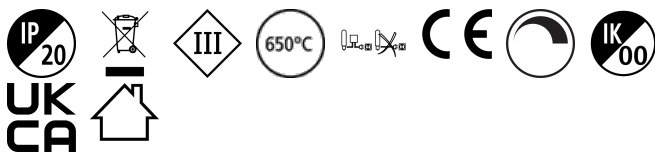


PRODUCT OVERVIEW

Product name	Flex Pro IP20 2450lm 930
Technology	LED
General application	Hospitality
ETIM Class	EC002706
E-number FI	4278331
Warranty	5 years
Useful luminous flux (Fuse)	2450
Fixture luminous flux (lm)	2450
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Photobiological Risk Group	RG1
Power consumption (W)	24
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681689


PHOTOMETRY

Flex Pro Low Output
Flex Pro IP20 2450lm 930
0068168



0.5	1.05 1.05	E(0°) E(90°) E(180°)	655 55 55
1.0	3.10 3.15	E(0°) E(90°) E(180°)	165 15 15
1.5	4.66 4.73	E(0°) E(90°) E(180°)	75 6 6
2.0	6.21 6.30	E(0°) E(90°) E(180°)	41 3 3
2.5	7.76 7.88	E(0°) E(90°) E(180°)	26 2 2
3.0	9.31 9.45	E(0°) E(90°) E(180°)	18 1 1

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 116.2°)
C90 - C270 (Half beam angle: 114.4°)



TECHNICAL DRAWINGS

