

### Features

- DELTAWING 1200 3K DALI EM is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1160x160x60mm dimensions, 38W system power, 4,200lm flux and 111lm/W efficacy, CRi (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, DALI dimmable driver and 3hrs emergency with LiFePO4 battery, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


### Product Overview

<b>Product name</b>	DELTAWING 1200 3K DALI EM
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate, Steel
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>General application</b>	Education, Logistics & Industry, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4200
<b>Luminaire efficacy (lm/W)</b>	111
<b>Correlated colour temperature (k)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	120
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	315
<b>Total power consumption (W)</b>	38
<b>Electrical protection</b>	Class I

## DELTAWING 1200 3K DALI EM 0042921

Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9003
IP rating	IP44
IK rating	IK06
Product EAN number	5410288429212
Warranty	5 years
Dimming method	DALI

### Photometry

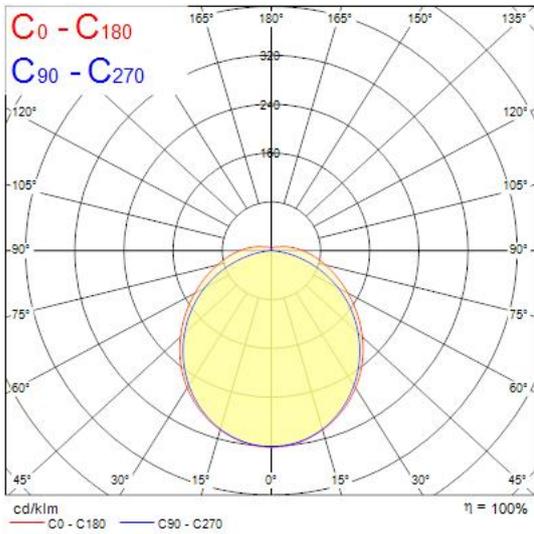

### Technical drawings

