



Data Sheet | Item Number: 870-541/281-727/870-518
Component terminal block; double-deck; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²;
CAGE CLAMP®; 2,50 mm²; gray

Data Sheet | Item Number: 870-541/281-727/870-518
Component terminal block; double-deck; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²;
CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/870-541/281-727/870-518>

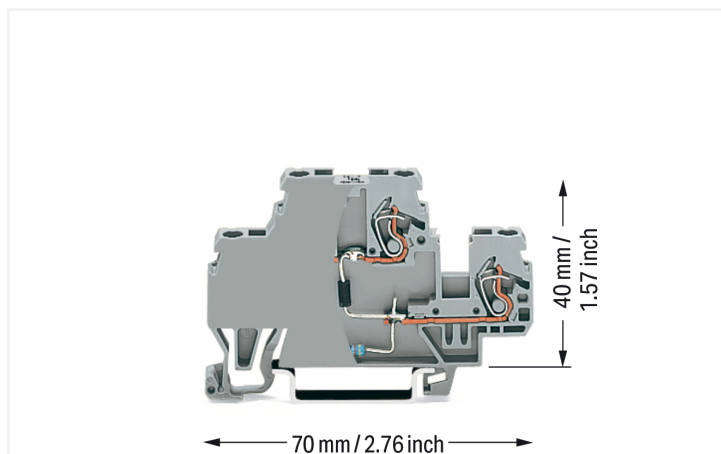

Color: gray

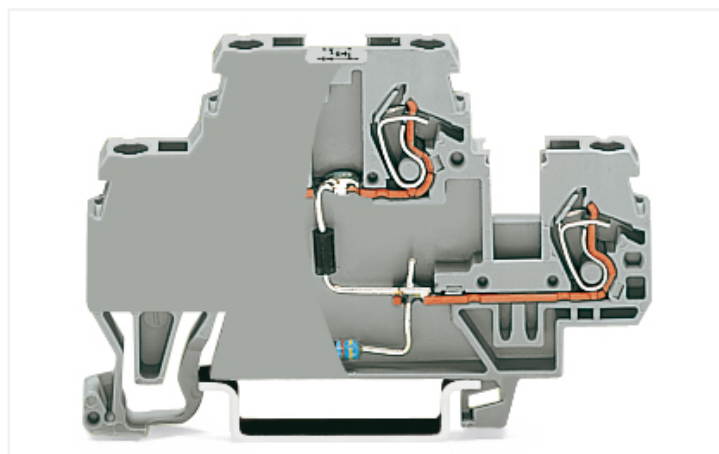

Electrical data	
Power	100 W
Power factor	0.95
Current	1.5 A
Voltage	230 V
Frequency	50 Hz
Efficiency	0.95
Temperature	40 °C
Humidity	50 %
Altitude	1000 m
Latitude	45 °N
Longitude	10 °E
Time zone	UTC+1
Language	English
Unit system	SI
Measurement method	Direct measurement
Measurement accuracy	± 1 %
Measurement resolution	0.1 %
Measurement range	0 to 100 %
Measurement duration	10 min
Measurement frequency	1 Hz
Measurement interval	1 s
Measurement delay	0.1 s
Measurement error	± 0.5 %
Measurement uncertainty	± 0.2 %
Measurement repeatability	± 0.1 %
Measurement reproducibility	± 0.1 %
Measurement stability	± 0.1 %
Measurement reliability	± 0.1 %
Measurement validity	± 0.1 %
Measurement integrity	± 0.1 %
Measurement confidentiality	± 0.1 %
Measurement availability	± 0.1 %
Measurement accessibility	± 0.1 %
Measurement interoperability	± 0.1 %
Measurement compatibility	± 0.1 %
Measurement portability	± 0.1 %
Measurement scalability	± 0.1 %
Measurement flexibility	± 0.1 %
Measurement adaptability	± 0.1 %
Measurement robustness	± 0.1 %
Measurement resilience	± 0.1 %
Measurement recoverability	± 0.1 %
Measurement durability	± 0.1 %
Measurement maintainability	± 0.1 %
Measurement supportability	± 0.1 %
Measurement disposability	± 0.1 %
Measurement lifecycle	± 0.1 %
Measurement sustainability	± 0.1 %
Measurement security	± 0.1 %
Measurement privacy	± 0.1 %
Measurement ethics	± 0.1 %
Measurement law	± 0.1 %
Measurement regulation	± 0.1 %
Measurement standard	± 0.1 %
Measurement norm	± 0.1 %
Measurement rule	± 0.1 %
Measurement principle	± 0.1 %
Measurement theory	± 0.1 %
Measurement model	± 0.1 %
Measurement framework	± 0.1 %
Measurement architecture	± 0.1 %
Measurement design	± 0.1 %
Measurement implementation	± 0.1 %
Measurement deployment	± 0.1 %
Measurement operation	± 0.1 %
Measurement maintenance	± 0.1 %
Measurement support	± 0.1 %
Measurement disposal	± 0.1 %
Measurement lifecycle management	± 0.1 %
Measurement sustainability management	± 0.1 %
Measurement security management	± 0.1 %
Measurement privacy management	± 0.1 %
Measurement ethics management	± 0.1 %
Measurement law management	± 0.1 %
Measurement regulation management	± 0.1 %
Measurement standard management	± 0.1 %
Measurement norm management	± 0.1 %
Measurement rule management	± 0.1 %
Measurement principle management	± 0.1 %
Measurement theory management	± 0.1 %
Measurement model management	± 0.1 %
Measurement framework management	± 0.1 %
Measurement architecture management	± 0.1 %
Measurement design management	± 0.1 %
Measurement implementation management	± 0.1 %
Measurement deployment management	± 0.1 %
Measurement operation management	± 0.1 %
Measurement maintenance management	± 0.1 %
Measurement support management	± 0.1 %
Measurement disposal management	± 0.1 %
Measurement lifecycle management	± 0.1 %
Measurement sustainability management	± 0.1 %
Measurement security management	± 0.1 %
Measurement privacy management	± 0.1 %
Measurement ethics management	± 0.1 %
Measurement law management	± 0.1 %
Measurement regulation management	± 0.1 %
Measurement standard management	± 0.1 %
Measurement norm management	± 0.1 %
Measurement rule management	± 0.1 %
Measurement principle management	± 0.1 %
Measurement theory management	± 0.1 %
Measurement model management	± 0.1 %
Measurement framework management	± 0.1 %
Measurement architecture management	± 0.1 %
Measurement design management	± 0.1 %
Measurement implementation management	± 0.1 %
Measurement deployment management	± 0.1 %
Measurement operation management	± 0.1 %
Measurement maintenance management	± 0.1 %
Measurement support management	± 0.1 %
Measurement disposal management	± 0.1 %
Measurement lifecycle management	± 0.1 %
Measurement sustainability management	± 0.1 %
Measurement security management	± 0.1 %
Measurement privacy management	± 0.1 %
Measurement ethics management	± 0.1 %
Measurement law management	± 0.1 %
Measurement regulation management	± 0.1 %
Measurement standard management	± 0.1 %
Measurement norm management	± 0.1 %
Measurement rule management	± 0.1 %
Measurement principle management	± 0.1 %
Measurement theory management	± 0.1 %
Measurement model management	± 0.1 %
Measurement framework management	± 0.1 %
Measurement architecture management	± 0.1 %
Measurement design management	± 0.1 %
Measurement implementation management	± 0.1 %
Measurement deployment management	± 0.1 %
Measurement operation management	± 0.1 %
Measurement maintenance management	± 0.1 %
Measurement support management	± 0.1 %
Measurement disposal management	± 0.1 %
Measurement lifecycle management	± 0.1 %
Measurement sustainability management	± 0.1 %
Measurement security management	± 0.1 %
Measurement privacy management	± 0.1 %
Measurement ethics management	± 0.1 %
Measurement law management	± 0.1 %
Measurement regulation management	± 0.1 %
Measurement standard management	± 0.1 %
Measurement norm management	± 0.1 %
Measurement rule management	± 0.1 %
Measurement principle management	± 0.1 %
Measurement theory management	± 0.1 %
Measurement model management	± 0.1 %
Measurement framework management	± 0.1 %
Measurement architecture management	± 0.1 %
Measurement design management	

General information

Nominal voltage	250 V
Reverse voltage	1000 V
Resistor	100R

Connection data

Clamping units	4
Number of levels	2

Connection 1

Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Wiring direction	Front-entry wiring

Physical data

Width	5 mm / 0.197 inches
Height	70 mm / 2.756 inches
Depth from upper-edge of DIN-rail	40 mm / 1.57 inches
Depth	46.4 mm / 1.827 inches



Mechanical data	
Design	with end plate
Mounting type	DIN-35 rail
Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.264 MJ
Weight	12.5 g
Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Commercial data	
Product Group	16 (Rail Mounted Terminal Blocks with CCC)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454198640
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	Lead 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	2b17a838-9a23-4c8d-87eb-b5fc2dbf6e5f
SCIP notification number (Belgium)	156c06e7-10ba-460a-ae78-2d812b833c74
SCIP notification number (Bulgaria)	38324fd5-0585-4f6f-8c3f-eba98bf9eb3c
SCIP notification number (Czech Republic)	bdb9c059-cfb3-4aaf-9317-79e87e602ac0
SCIP notification number (Denmark)	bf88f8a0-1568-4bd3-9804-6395f0c72aef
SCIP notification number (Finland)	559aaba4-7e89-4aca-ab15-2fd290149d47
SCIP notification number (France)	db4345ef-b3cd-4b53-ba83-5fecee167b2c
SCIP notification number (Germany)	70f1c264-c72e-4262-a815-748ae53664fc
SCIP notification number (Hungary)	4c067a32-7fd5-4739-8a17-84fbef92313b
SCIP notification number (Italy)	9e986292-7763-4fb2-b980-968ef484c68a
SCIP notification number (Netherlands)	1c4f6dde-63c1-4a21-910c-3f70d310a556
SCIP notification number (Poland)	d25b479c-d187-4774-9918-41a45a09ab96
SCIP notification number (Romania)	c5c9275a-c6f6-44f7-a548-039981fbcc8d
SCIP notification number (Sweden)	503b9931-ae28-49de-83be-9947bf0f89f7

Downloads

Environmental Product Compliance

Compliance Search

↓

Documentation

Additional Information

Technical Section

pdf
2246.92 KB

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate

[Item No.: 870-518](#)
End and intermediate plate; 2 mm thick; gray

[Item No.: 870-519](#)
End and intermediate plate; 2 mm thick; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories

[Item No.: 210-196](#)
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[Item No.: 210-198](#)
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[Item No.: 210-508](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[Item No.: 210-197](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[Item No.: 210-506](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

[Item No.: 210-114](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[Item No.: 210-118](#)
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[Item No.: 210-115](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

[Item No.: 210-112](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

[Item No.: 210-504](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[Item No.: 210-113](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[Item No.: 210-505](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored



1.2.2 Ferrule

1.2.2.1 Ferrule



Item No.: 216-321
Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow



Item No.: 216-131
Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored



Item No.: 216-322
Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise



Item No.: 216-132
Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated



Item No.: 216-221
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white



Item No.: 216-121
Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored



Item No.: 216-222
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray



Item No.: 216-122
Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored



Item No.: 216-223
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red



Item No.: 216-123
Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored



Item No.: 216-224
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black



Item No.: 216-124
Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated

1.2.3 Installation

1.2.3.1 Mounting accessories



Item No.: 209-106
Mounting carrier; for isolated mounting on DIN 35 rails; gray



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.4 Insulation stop

1.2.4.1 Insulation stop



Item No.: 280-470
Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white



Item No.: 280-471
Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray



Item No.: 280-472
Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; black

1.2.5 Jumper

1.2.5.1 Jumper



Item No.: 870-405/011-000



Item No.: 870-407/011-000



Item No.: 870-409/011-000



Item No.: 870-406/020-000
Delta jumper; insulated; light gray



Item No.: 870-410
Jumper; 10-way; insulated; light gray



Item No.: 870-402
Jumper; 2-way; insulated; light gray



Item No.: 870-403
Jumper; 3-way; insulated; light gray



Item No.: 870-404
Jumper; 4-way; insulated; light gray



Item No.: 870-405
Jumper; 5-way; insulated; light gray



Item No.: 870-406
Jumper; 6-way; insulated; light gray



Item No.: 870-407
Jumper; 7-way; insulated; light gray



Item No.: 870-408
Jumper; 8-way; insulated; light gray



Item No.: 870-409
Jumper; 9-way; insulated; light gray



Item No.: 870-440
Jumper; from 1 to 10; insulated; light gray



Item No.: 870-433
Jumper; from 1 to 3; insulated; light gray



Item No.: 870-434
Jumper; from 1 to 4; insulated; light gray



1.2.5.1 Jumper



Item No.: 870-435
Jumper; from 1 to 5; insulated; light gray



Item No.: 870-436
Jumper; from 1 to 6; insulated; light gray



Item No.: 870-437
Jumper; from 1 to 7; insulated; light gray



Item No.: 870-438
Jumper; from 1 to 8; insulated; light gray



Item No.: 870-439
Jumper; from 1 to 9; insulated; light gray

1.2.6 Marking

1.2.6.1 Marker



Item No.: 2009-145/000-006
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-145/000-007
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-145/000-023
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-145/000-012
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-145/000-005
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 2009-145/000-024
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-145
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-145/000-002
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-006
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 248-501/000-007
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 248-501/000-023
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 248-501/000-017
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 248-501/000-012
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 248-501/000-005
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 248-501/000-024
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 248-501
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 248-501/000-002
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 793-5501/000-006
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 793-5501/000-007
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 793-5501/000-017
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 793-5501/000-012
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 793-5501/000-005
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 793-5501/000-024
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-5501/000-002
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 793-501/000-006
WMB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 793-501/000-007
WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-023
WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-017
WMB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 793-501/000-012
WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-501/000-024
WMB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-006
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

1.2.6.1 Marker



Item No.: 2009-115/000-007
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-023
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-115/000-017
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 2009-115/000-012
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-024
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-002
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.6.2 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.2.7 Protective warning marker

1.2.7.1 Cover



Item No.: 280-405
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.8 Tool

1.2.8.1 Operating tool



Item No.: 210-658
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-657
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured