

Concord

CONCORD BEACON MUSE 3000K SM SSC WHITE 2062578



Features

- Simple and slick integral design with no driver box and without any visible screws

New technology utilization for improved performance

Invisible in-track adaptor for an impressive architectural look

Extremely precise light beams due to the high-quality lens

#80mm die-cast aluminium body, Adjustable beam angle: between 8° - 55°, Textured white finishing colour

Light color temperature: 3000K, warm light

System power: 18W, Fixture lumen output: 980lm, efficacy: 55lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation

Operating voltage 220-240V / 50-60Hz, SylSmart SSC Surface mounting with surface mounting base. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only

Horizontal rotation: 355°, vertical tilt: 90°

Nominal product dimensions: D.80mmx215mm

5 years warranty. Suitable for ceiling surface mounting, and wall surface mounting

Product Overview


| | |
|-----------------------------------|--|
| Product name | CONCORD BEACON MUSE 3000K SM SSC WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling surface mounting, Wall surface mounted |
| Fixture rating | Enclosed |
| General application | Museums & Galleries, Retail, Hospitality |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 980 |
| Luminaire efficacy (lm/W) | 55 |
| LOR (%) | 100 |

Concord

CONCORD BEACON MUSE 3000K SM SSC WHITE 2062578

| | |
|-----------------------------------|----------------------------------|
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 97 |
| Colour Variation Initial (SDCM) | 2 |
| Beam Angle (°) | 55 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 18 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768625789 |
| Warranty | 5 years |
| Dimming method | SylSmart SSC |
| Useful luminous flux (#use) | 1000 |

Photometry

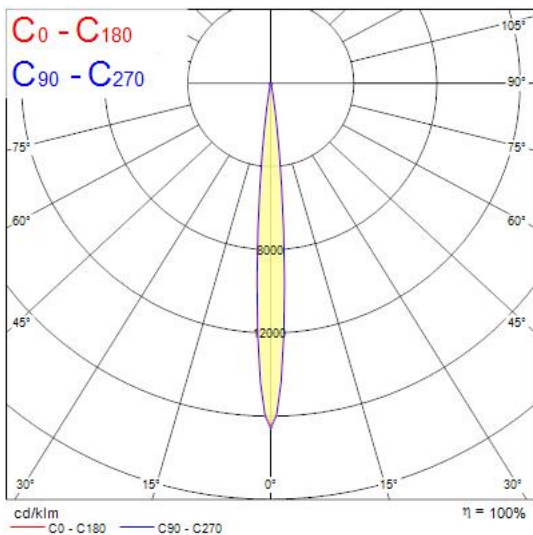

Technical drawings

