

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880



### Features

• OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC is a ceiling recessed luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. SylSmart Standalone controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.528; Fidelity Index R#: 97; Gamut Index R#: 101. For 4000K - Colour rendering index Ra >96; Melanopic Ratio MEER: 0.822; Fidelity Index R#: 95; Gamut Index R#: 101. For 6200K - Colour rendering index Ra >99; Melanopic Ratio MEER: 1.077; Fidelity Index R#: 96; Gamut Index R#: 99. For 4000K luminous flux: 4350lm. Power consumption: 46W. Luminaire efficacy: 95lm/W. UGR<16 Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.

### Product Overview


Product name	OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	95
Correlated colour temperature (k)	4000
Light colour	Tuneable White HCL

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880

<b>CRI (Ra)</b>	96
<b>Colour Consistency (SDCM)</b>	3
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 16
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	46
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Dimmable</b>	Yes
<b>Housing colour</b>	RAL9016
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5025768238804
<b>Warranty</b>	5 years
<b>Built in presence detector</b>	NONE
<b>Virtual assistant compatibility</b>	N/A
<b>Dimming method</b>	SylSmart SSC


### Photometry

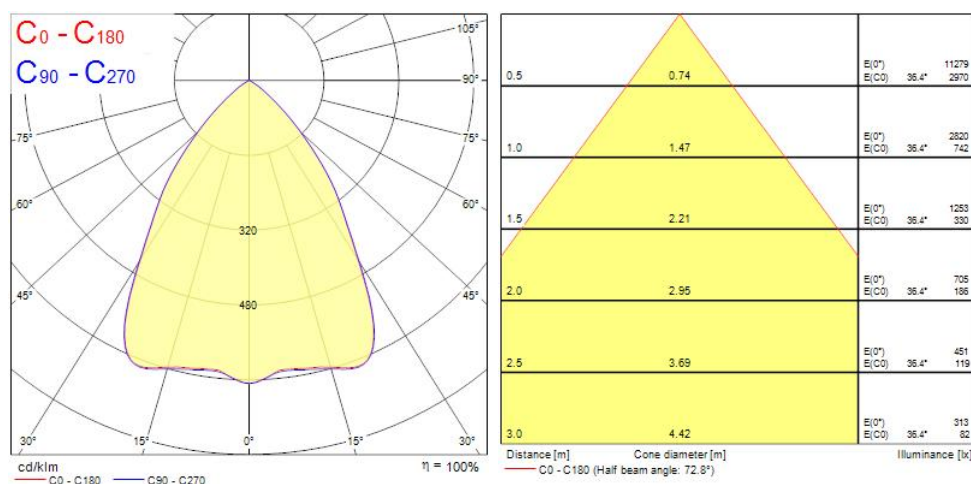

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880

### Technical drawings

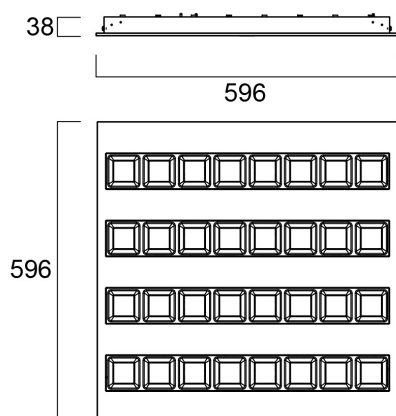

### Data table

#### GENERAL DATA

<b>Product name</b>	OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Built in presence detector</b>	NONE
<b>General application</b>	Education, Office
<b>Operating temperature range (°C)</b>	10°C...+25°C
<b>Performance ambient temperature Tq (°C)</b>	25
<b>Virtual assistant compatibility</b>	N/A
<b>ETIM Class</b>	EC002892
<b>Warranty</b>	5 years

#### OPTICAL DATA

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880

Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	95
Correlated colour temperature (k)	4000
Light colour	Tuneable White HCL
CRI (Ra)	96
Colour Variation Initial (SDCM)	3
Colour Consistency (SDCM)	3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	46
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	300
Inrush Current (A)	23
Inrush Duration (µs)	290
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	13
Max. products per 16A C Breaker	19
Max. products per 10A B Breaker	11
Max. products per 16A B Breaker	19
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	68000

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

### PACKAGING

Product EAN number	5025768238804
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05025768238804
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

### SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

# Concord

OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC  
**2023880**

---