

Start eco Surface Wall Round IP54
START eco Surface Wall Round IP54 880lm 830 WHT
0047933



PRODUCT OVERVIEW

Product name	START eco Surface Wall Round IP54 880lm 830 WHT
Technology	LED
Housing	Aluminium
Environment	External
Warranty	3 years
Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Total power consumption (W)	12
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Product EAN number	5410288479330

DATA TABLE

General data	
Product name	START eco Surface Wall Round IP54 880lm 830 WHT
Technology	LED
Housing	Aluminium
Environment	External
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
Warranty	3 years
Optical data	

Start eco Surface Wall Round IP54

START eco Surface Wall Round IP54 880lm 830 WHT

0047933

Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	12
Current (A)	0.09
Lamp power factor	0.6
Electrical protection	Class I
Drive current (mA)	60
Inrush Current (A)	10
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	50

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	202
Weight (kg)	0.84

Packaging



Single packaging type	Carton
Product EAN number	5410288479330
Packaging single width (cm)	24.0
Packaging single depth (cm)	9.0
DUN14 (outer)	15410288479337
Packaging outer length / height (cm)	25.5

Safety data

Optimal operating condition (°C)	-20-45
----------------------------------	--------

PHOTOMETRY

Start eco Surface Wall Round IP54
START eco Surface Wall Round IP54 880lm 830 WHT
0047933

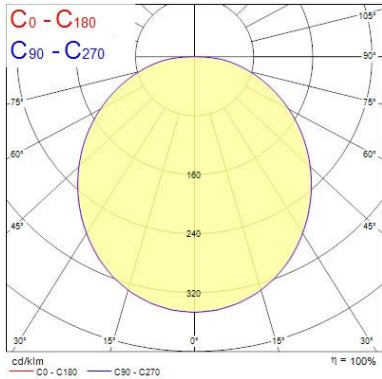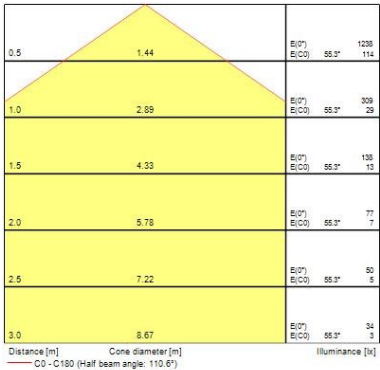

TECHNICAL DRAWINGS

