

START eco Surface Wall Round IP54 880lm 830 WHT
0047933



Features


- Exterior surface wall light luminaire, Round shape, white aluminium - RAL9016, 880lm, 12W, 73lm/W, 3000K, Driver Current: 60mA, CRI:80+, 220-240V, IP54, IK05, 30.000 hrs (L70), (HxWxD) 50x202x202mm, Class 1, energy class: A++, A+, A

Product Overview


Product name	START eco Surface Wall Round IP54 880lm 830 WHT
Technology	LED
Housing	Aluminium
Environment	External
Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Total power consumption (W)	12
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Product EAN number	5410288479330
Warranty	3 years
Colour Code	830

START eco Surface Wall Round IP54 880lm 830 WHT
0047933

Photometry

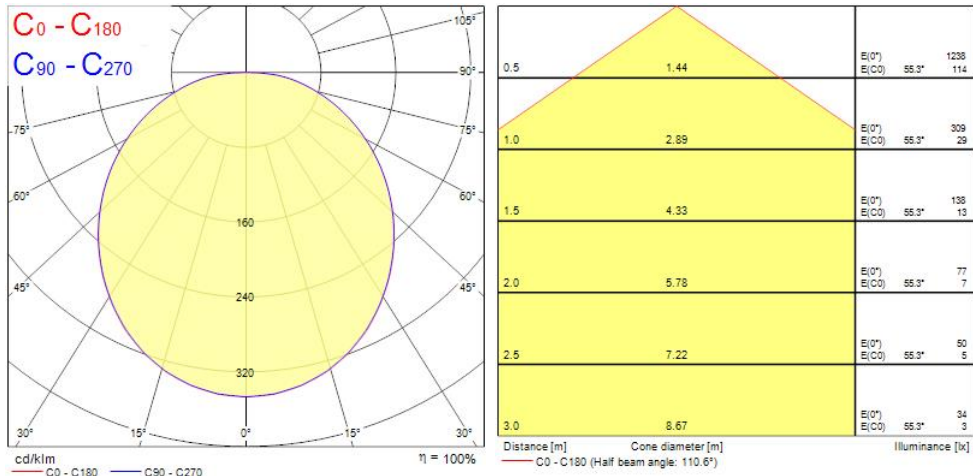

Technical drawings

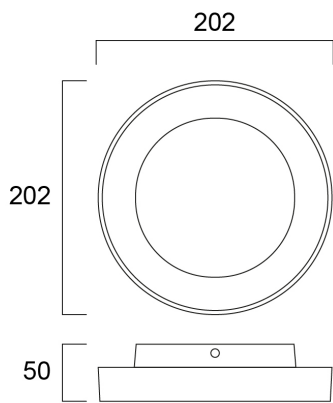

Data table

GENERAL DATA

START eco Surface Wall Round IP54 880lm 830 WHT 0047933

Product name	START eco Surface Wall Round IP54 880lm 830 WHT
Technology	LED
Housing	Aluminium
Environment	External
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	12
Current (A)	0.09
Lamp power factor	0.6
Electrical protection	Class I
Control gear required	No
Drive current (mA)	60
Inrush Current (A)	10
Inrush Duration (µs)	250
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	50

START eco Surface Wall Round IP54 880lm 830 WHT
0047933

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	202
Weight (kg)	0.84

PACKAGING

Single packaging type	Carton
Product EAN number	5410288479330
Packaging single width (cm)	24.0
Packaging single depth (cm)	9.0
DUN14 (outer)	15410288479337
Packaging outer length / height (cm)	25.5

SAFETY DATA

Optimal operating condition (°C)	-20-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No