

Features

- DELTAWING 1500 3K MW is a ceiling and wall surface, suspended LED luminaire with opal diffuser, 1440x160x60mm dimensions, 55W system power, 6,850lm flux and 125lm/W efficacy, CRi (Ra) >80, 3000K (Warm White) CCT, chromaticity tolerance of 3-step MacAdam ellipse, non-dimmable driver with built-in MW sensor, RAL9003 finishing, L70B50 100khrs / L80B50 80khrs lifespan, IK06 impact resistance, IP44 ingress protection rating (in ceiling surface installation), Electrical protection Class I, Glow wire test 850°C.


Product Overview

| | |
|-----------------------------------|--|
| Product name | DELTAWING 1500 3K MW |
| Technology | LED (3 SDCM) |
| Cap/Base | N/A |
| Housing | PC Polycarbonate, Steel |
| Mount | Ceiling surface mounting, Wall surface mounted |
| General application | Education, Logistics & Industry, Office |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 6850 |
| Luminaire efficacy (lm/W) | 125 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 120 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 55 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | Yes |

DELTAWING 1500 3K MW 0042927

| | |
|--------------------|---------------|
| Housing colour | RAL9003 |
| IP rating | IP44 |
| IK rating | IK06 |
| Product EAN number | 5410288429274 |
| Warranty | 5 years |
| Dimming method | N/A |

Photometry

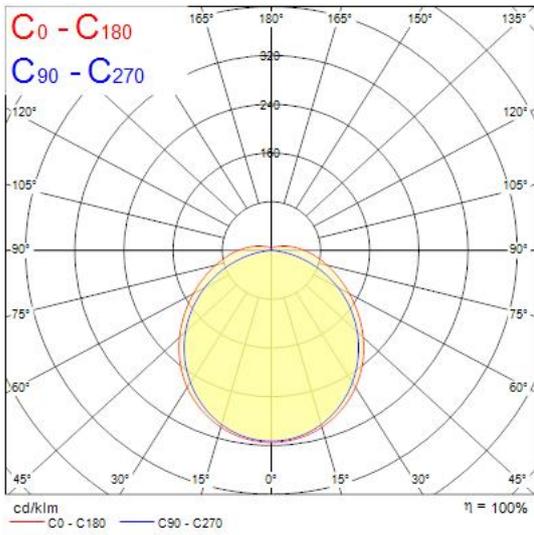

Technical drawings

