

START eco Flood Flat IP65 4500lm 840 0047969



Features


• The new Start eco Flood Flat comes with improved design. The streamlined, durable, lightweight die-cast aluminium body makes it a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black die-cast aluminum housing, white reflector, 4750 lm, 50 W, 95 lm/W, 4000K, drive current 193 mA, non dimmable, CRI>80, IP65, IK07, Class I, lumen maintenance L70:B50: 30000 hrs, 193 x 190 x 48 mm (L x W x H). Weight: 0.785kg. Energy class: A++ A+ A.

Product Overview


Product name	START eco Flood Flat IP65 4500lm 840
Technology	LED
Housing	Aluminium
E-number FI	4579437
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	95
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK07
Product EAN number	5410288479699
Warranty	3 years

START eco Flood Flat IP65 4500lm 840 0047969

Photometry

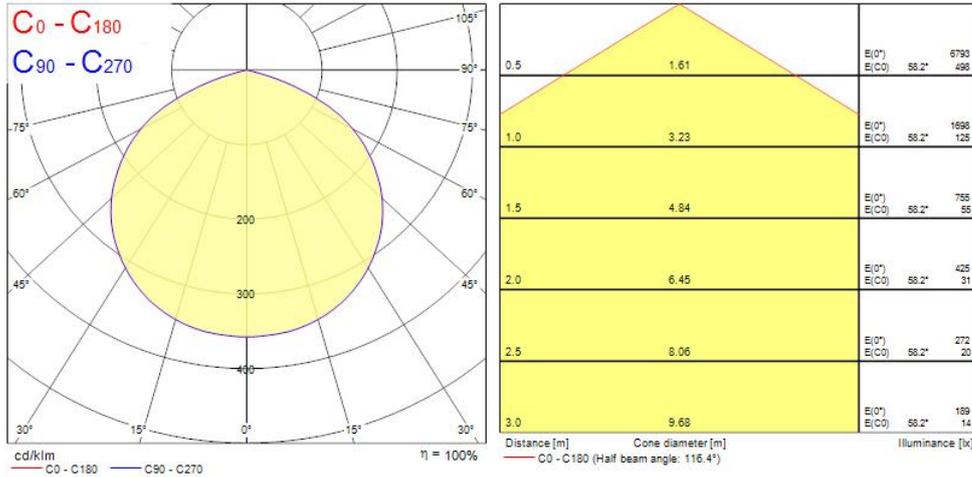

Technical drawings

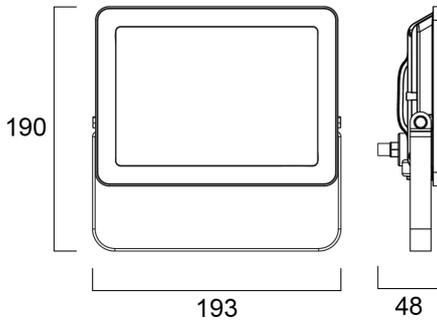

Data table

GENERAL DATA

Product name

START eco Flood Flat IP65 4500lm 840

START eco Flood Flat IP65 4500lm 840 0047969

Technology	LED
Housing	Aluminium
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4579437
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	95
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	50
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Drive current (mA)	193
Inrush Current (A)	19.8
Inrush Duration (µs)	590
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	13
Max. products per 20A B Breaker	14
Mains surge immunity (differential mode -> L-N) (kV)	1
Mains surge immunity (common mode -> L/N - GND) (kV)	2

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

START eco Flood Flat IP65 4500lm 840 0047969

PHYSICAL DATA

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK07
Nominal Product Length (mm)	193
Nominal Product Width (mm)	190
Weight (kg)	0.785

PACKAGING

Single packaging type	Carton
Product EAN number	5410288479699
Packaging single width (cm)	6.0
Packaging single depth (cm)	15.7
DUN14 (outer)	15410288479696
Packaging outer length / height (cm)	32.5

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No