

START Flex Low Output
START Flex IP65 840 2750lm
0068128



Product features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2750lm per 5m (550lm per 1m); 24V; 4000K; CRI80; SDCM 3;Compatible with emergency packs: 0046600, 0046601




PRODUCT OVERVIEW

Product name	START Flex IP65 840 2750lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276598
Warranty	5 years
Useful luminous flux (Fuse)	2750
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	115
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Power consumption (W)	24
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
Housing colour	Beige
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681283

PHOTOMETRY

START Flex Low Output
START Flex IP65 840 2750lm
0068128

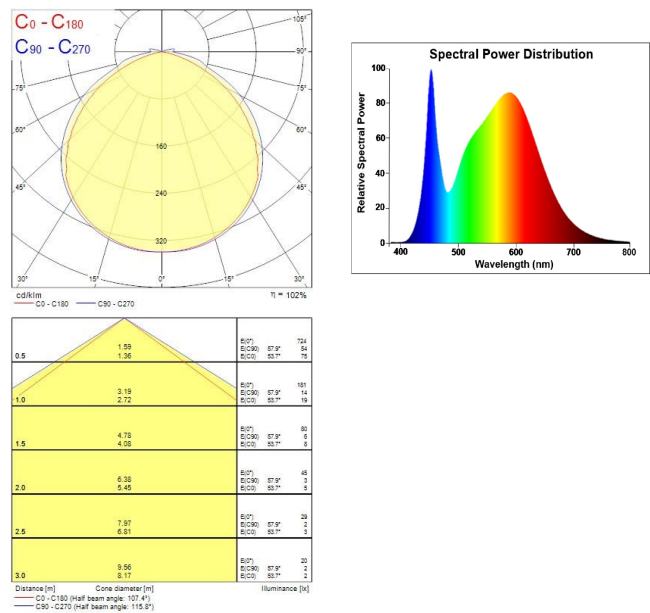

TECHNICAL DRAWINGS

