


START Panel IP54 UGR19 600x600
START PANEL IP54 MLTPWR U19 600 4350LM 830
0047992

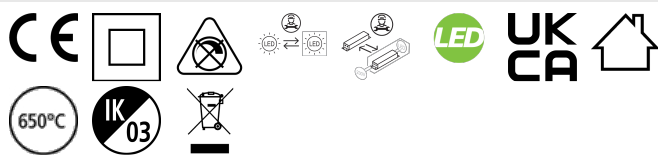

PRODUCT OVERVIEW











Product name	START PANEL IP54 MLTPWR U19 600 4350LM 830
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
E-number FI	4276987
Warranty	5 years
Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	121
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	Electronic ballast multiwatt
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288479927

PHOTOMETRY

START Panel IP54 UGR19 600x600

START PANEL IP54 MLTPWR U19 600 4350LM 830

0047992



START Panel IP54 UGR19 600x600

START PANEL IP54 MLTPWR U19 600 4350LM 830

0047992

TECHNICAL DRAWINGS

