


# INSET TREND SW IP44 OUTD AN EX LMP

Item No: 3099390



PRO

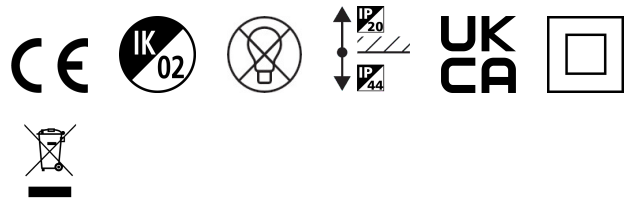


75mm cut out. 2 x 25° Tilt. Round bezel.

## Technical Assets

Dimensions (mm)

Photometrics

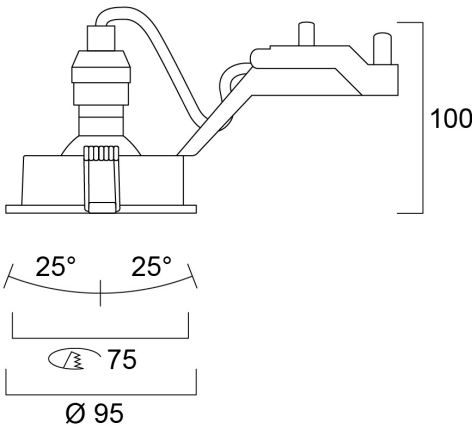

# INSET TREND SW IP44 OUTD AN EX LMP

Item No: 3099390



## General data

|                     |                                        |
|---------------------|----------------------------------------|
| Product name        | INSET TREND SW IP44<br>OUTD AN EX LMP  |
| Technology          | LED/Halogen                            |
| Cap/Base            | GU10                                   |
| Housing             | Aluminium                              |
| Mount               | Ceiling recessed<br>mounting           |
| Environment         | Indoor                                 |
| General application | Hospitality, Residential<br>& Consumer |
| ETIM Class          | EC001744                               |
| E-number FI         | 4271331                                |
| E-number SE         | 7463930                                |
| Warranty            | 3 years                                |

## Optical data

|                         |                   |
|-------------------------|-------------------|
| LOR (%)                 | Dependent on lamp |
| Adjustable chromaticity | N                 |

## Electrical data

|                                          |                                |
|------------------------------------------|--------------------------------|
| Light source included                    | Fixture without<br>Lightsource |
| Primary Supply/Product voltage - min (V) | 230                            |
| Primary Supply/Product voltage - max (V) | 240                            |
| Electrical protection                    | Class II                       |
| Nominal Frequency (Hz)                   | 50/60Hz                        |

## Physical data

|                             |            |
|-----------------------------|------------|
| Housing colour              | Anthracite |
| IP rating                   | IP44/20    |
| IK rating                   | IK02       |
| Nominal Product Length (mm) | 95         |
| Nominal Product Width (mm)  | 95         |
| Nominal Product Height (mm) | 100        |
| Weight (kg)                 | 0.177      |
| Recessed Depth (mm)         | 100        |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 8711971993902  |
| Packaging single length / height (cm) | 13.11          |
| Packaging single width (cm)           | 10.09          |
| Packaging single depth (cm)           | 8.48           |
| DUN14 (inner)                         | 18711971993909 |
| Units per outer package               | 30             |
| Packaging outer length / height (cm)  | 28.8           |
| Packaging outer width (cm)            | 28.7           |
| Packaging outer depth (cm)            | 53.0           |