

## TOLEDO BALL

ToLEDo Ball V7 806LM 865 E14 SL

0029634



### Product features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent ball lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life



## PRODUCT OVERVIEW

Product name	ToLEDo Ball V7 806LM 865 E14 SL
Technology	LED
Watt (Rated) (W)	6.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741019
Warranty	3 years
Luminous flux (lm)	806
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	6.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288296340

## DATA TABLE

### General data

Product name	ToLEDo Ball V7 806LM 865 E14 SL
--------------	---------------------------------

## TOLEDO BALL

ToLEDo Ball V7 806LM 865 E14 SL

0029634

Technology	LED
Watt (Rated) (W)	6.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741019
Warranty	3 years

### Optical data

Luminous flux (lm)	806
Luminous flux (Rated) (lm)	806
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	6.5
Equivalent watt (W)	60
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	2.8
Inrush Duration (µs)	380
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	57
Max. products per 16A B Breaker	29

### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Length (mm)	82
Nominal Product Diameter (mm)	45
Weight (kg)	0.018

## TOLEDO BALL

ToLEDo Ball V7 806LM 865 E14 SL

0029634


### Packaging

Single packaging type	Carton
Product EAN number	5410288296340
Packaging single length / height (cm)	5.0
Packaging single width (cm)	5.0
Packaging single depth (cm)	9.5
DUN14 (outer)	15410288296347
Units per outer package	6
Packaging outer length / height (cm)	15.8
Packaging outer width (cm)	10.7
Packaging outer depth (cm)	10.2


### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

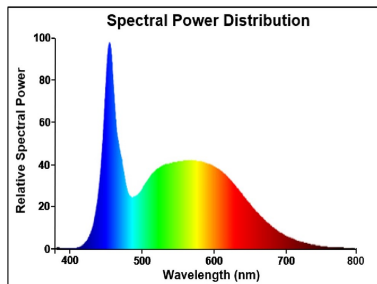

## TECHNICAL DRAWINGS



# SYLVANIA


## TOLEDO BALL

ToLEDo Ball V7 806LM 865 E14 SL  
0029634



### SYLVANIA

0029634

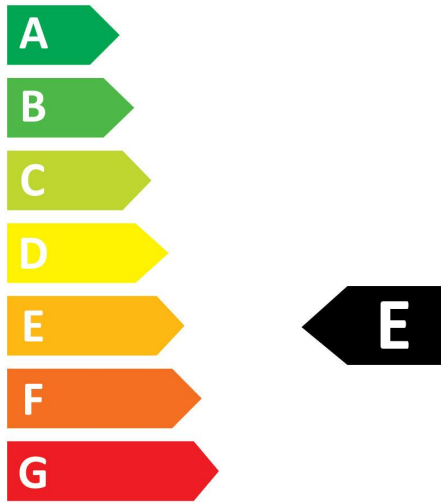

**7**  
kWh/1000h




2019/2015

## TOLEDO BALL

ToLEDo Ball V7 806LM 865 E14 SL  
0029634



0029634

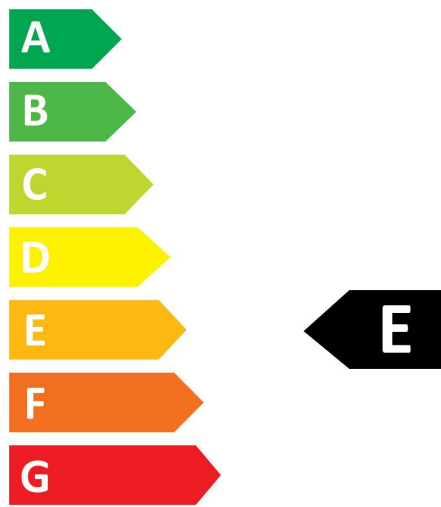

**7**  
kWh/1000h



2019/2015