



# Accessories for interface relays CR-P and CR-M

## Jumper bars CR-PJ, CR-MJ

### Data sheet



CR-PJ



CR-MJ

#### Features

- Jumper bar for connection of up to 10 CR-P or CR-M range sockets with screw connection

#### Marks

CE CE

#### Order data

| Type         | Recommended use                                                                           | Order code                |
|--------------|-------------------------------------------------------------------------------------------|---------------------------|
| Jumper bar   |                                                                                           |                           |
| <b>CR-PJ</b> | Jumpering of coil contacts „A2“ or relay common contacts using CR-P range logical sockets | <b>1SVR 405 658 R5000</b> |
| <b>CR-MJ</b> | Jumpering of coil contacts „A2“ or relay common contacts using CR-M range logical sockets | <b>1SVR 405 658 R6000</b> |

#### Technical data

| Type                                                                                |                   | CR-PJ        | CR-MJ  |
|-------------------------------------------------------------------------------------|-------------------|--------------|--------|
| Rated operational voltage (VDE 0660 / part 500)                                     |                   | 400 V        |        |
| Rated current (VDE 0660 / part 500)                                                 |                   | 25 A         |        |
| Electrical connection                                                               |                   |              |        |
| Bus bar diameter                                                                    |                   | 6 mm²        |        |
| Rail length                                                                         | with isolation    | 150 mm       | 255 mm |
|                                                                                     | without isolation | 141.5 mm     | 245 mm |
| Step distance                                                                       |                   | 15.5 mm      | 27 mm  |
| Stripping length of a connection wire that is used in combination with a jumper bar |                   | 6 mm         |        |
| Environmental data                                                                  |                   |              |        |
| Ambient temperature range                                                           | operation         | -40...+55 °C |        |
| Isolation data                                                                      |                   |              |        |
| Rated impulse withstand voltage U <sub>imp</sub> (VDE 0660 / Teil 500)              |                   | 4 kV         |        |
| Overvoltage category (IEC/EN 60664)                                                 |                   | III          |        |
| Polution degree (IEC/EN 60664)                                                      |                   | 2            |        |
| General data                                                                        |                   |              |        |
| Material of rail                                                                    |                   | E-Cu-F25     |        |
| Type of rail                                                                        |                   | pin type     |        |
| Number of pins                                                                      |                   | 10           |        |
| Number of phases                                                                    |                   | 1            |        |
| Color of insulating material                                                        |                   | RAL 7035     |        |
| Flammability (UL94)                                                                 |                   | V0           |        |


# Accessories for interface relays CR-P and CR-M

## Jumper bars CR-PJ, CR-MJ


### Data sheet

Dimensions

in mm

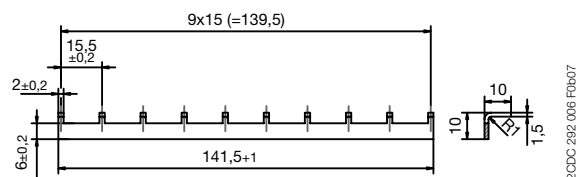

**CR-PJ**

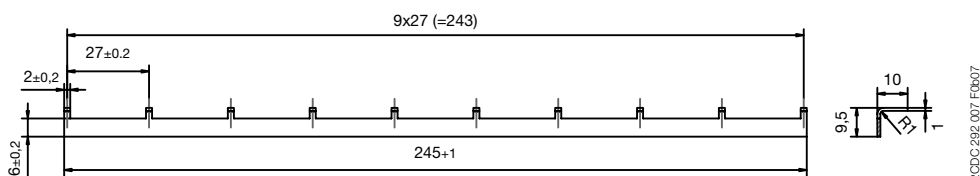

**CR-MJ**

Further documentation

| Document title | Document type | Document number    |
|----------------|---------------|--------------------|
| Sockets CR-P   | Data sheet    | 2CDC 117 004 D0203 |
| Sockets CR-M   | Data sheet    | 2CDC 117 005 D0203 |



**ABB STOTZ-KONTAKT GmbH**

Eppelheimer Strasse 82, 69123 Heidelberg, Germany  
Postfach 10 16 80, 69006 Heidelberg, Germany  
Internet <http://www.abb.com/lowvoltage> → Control Products

Contact: <http://www.abb.com/contacts> → Low Voltage Products and Systems

As part of the on-going product improvement, ABB reserves the right to modify the characteristics of the products described in this document. The information given is non-contractual.

For further details please contact ([www.abb.com/contacts](http://www.abb.com/contacts)) the ABB company marketing these products in your country.

Document number: 2CDC 117 015 D0201 (02/2008)