


PRO

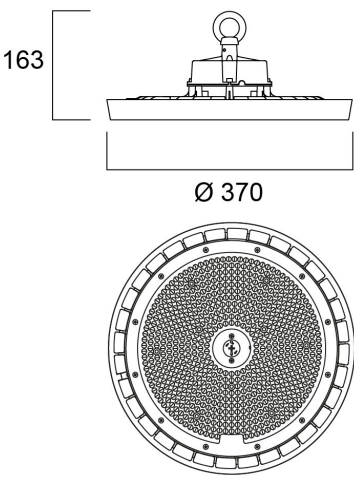

|     |      |     |      |
|-----|------|-----|------|
| 0.5 | 0.06 | 50° | 3024 |
|     |      | 50° | 1958 |
| 1.0 | 1.73 | 50° | 2280 |
|     |      | 50° | 400° |
| 1.5 | 2.59 | 50° | 1020 |
|     |      | 50° | 2178 |
| 2.0 | 3.45 | 50° | 560  |
|     |      | 50° | 1224 |
| 2.5 | 4.32 | 50° | 360  |
|     |      | 50° | 754  |
| 3.0 | 5.18 | 50° | 200  |
|     |      | 50° | 544  |

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 91.6°)

