


Features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 6300lm, 50W, 126lm/W, CRI80, Symmetrical Wide beam angle (60°), 100000 hrs L80B20 lifespan, 314 x 240 x 63mm (LxWxD) dimensions, 2.5kg weight.

Product Overview

Product name	Kalani IP66 6KLM 830 WB
Technology	LED
Cap/Base	N/A
E-number FI	4579555
Fixture luminous flux (lm)	6300
Luminaire efficacy (lm/W)	126
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485249
Warranty	5 years

Photometry

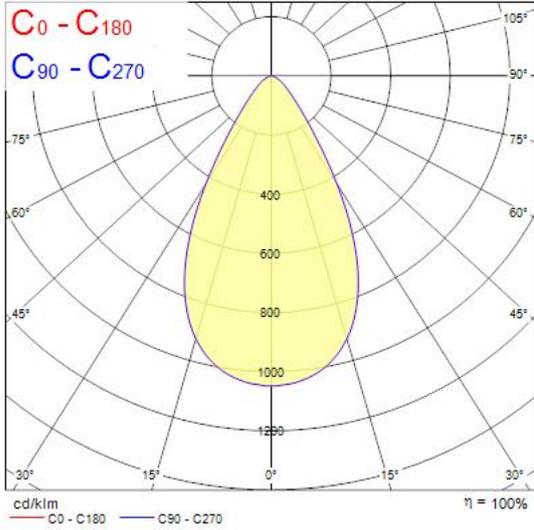

Technical drawings

