

Start Surface IP66 Ø350mm Sensor Dim

START SURFACE IP66 2500LM 840 MW SENS IK10 WHT
0049021



Product features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 2500lm as max. lumen output, can be adjusted down to 1750lm by internal switch, 25W max. power consumption, 100lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws









PRODUCT OVERVIEW

Product name	START SURFACE IP66 2500LM 840 MW SENS IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579496
Warranty	5 years
Useful luminous flux (Fuse)	2500
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	100
LOR (%)	100
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	Other
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490212

Start Surface IP66 Ø350mm Sensor Dim

START SURFACE IP66 2500LM 840 MW SENS IK10 WHT 0049021

PHOTOMETRY

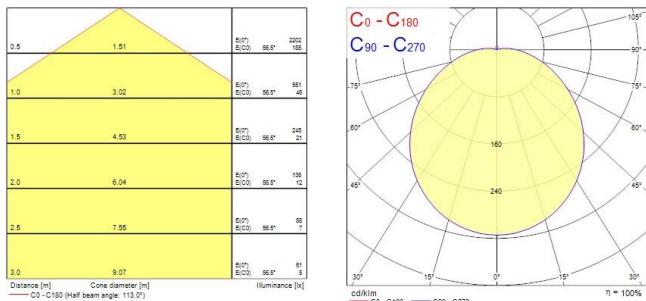

TECHNICAL DRAWINGS

Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 2500LM 840 MW SENS IK10 WHT
0049021

