

Product Environmental Profile

Lighting outlet position with 2-way switch Living Now series



BTICINO'S ENVIRONMENTAL COMMITMENTS

• Incorporate environmental management into our industrial sites

Of all Legrand sites worldwide, over 85% are ISO 14001-certified [sites belonging to the Group for more than five years].

• Offer our customers environmentally friendly solutions

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.


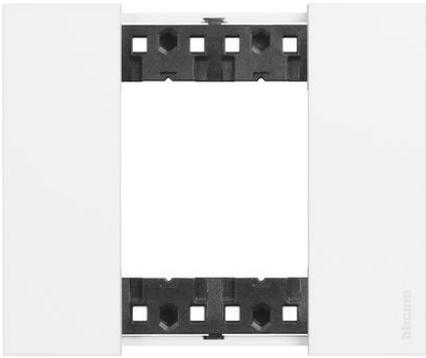
• Involve the environment in product design and provide informations in compliance with ISO 14025

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

Function	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 10 A, for the operating voltage of 250 V a.c.		
Reference Product			
	BT-K4003M2A	BT-KW01M2	
	1P 10 AX, 250 V a.c. 2-way switch, automatic clamps, lightable - 2 module	Lightable cover - 2 module - white	
			
	BT-K4702	BT-KA4802KW	
	2 module support supplied with protective shell - no fixing screws	2 modules Living Now plate - white	

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



PRODUCTS CONCERNED

The environmental data is representative of the following products:

BT-K4003M2A	BT-KW01M2	BT-K4702	BT-KA4802KW
BT-K4001M2A	BT-KG01M2 BT-KM01M2		BT-KA4802ZW - NW - DW - DA - MW - KM - ZM - DM - MM BT-KA4802KG - NG - ZG - DG

Product Environmental Profile

Lighting outlet position with 2-way switch Living Now series



■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EU amended by delegated directive (EU) 2015/863.

Total weight of Reference Product	210 g (all packaging included)				
Plastics as % of weight		Metals as % of weight		Other as % of weight	
Polyamide	20,9 %	Copper alloys	3,3 %		
Polycarbonate	14,3 %	Steel	2,4 %		
ABS	3,3 %	Silver alloys	< 0,1 %		
Polyketone	1,8 %	Other metals	< 0,1 %		
Other plastics	0,1 %				
Packaging					
Polyethylene	1,2 %			Wood	29,8 %
PET	0,9 %			Paper / Cardboard	21,6 %
Polypropylene	0,4 %				
PVC	< 0,1 %				
Total plastics	42,9 %	Total metals	5,7 %	Total other	51,4 %

Estimated recycled material content: 13 % by mass.

For the lighting outlet position with zamak cover plates:

Total weight of Reference Product	265 g (all packaging included)				
Plastics as % of weight		Metals as % of weight		Other as % of weight	
Polyamide	16,5 %	Zamak	25,4 %		
Polycarbonate	7,9 %	Copper alloys	2,6 %		
ABS	1,6 %	Steel	1,9 %		
Polyketone	1,4 %	Silver alloys	< 0,1 %		
Other plastics	0,1 %				
Packaging					
Polyethylene	1,0 %			Wood	23,5 %
PET	0,7 %			Paper / Cardboard	17,1 %
Polypropylene	0,3 %				
PVC	< 0,1 %				
Total plastics	29,5 %	Total metals	29,9 %	Total other	40,6 %

Estimated recycled material content: 9 % by mass.



■ MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



■ DISTRIBUTION

The Group's products are distributed from logistics centres located to optimize transport efficiency. The Reference Product is therefore transported over an average distance of 780 km, essentially by road, representing a marketing in Europe.

Packaging is compliant with European directive 2004/12/EC concerning packaging and packaging waste. At the packaging end of life, its recycling rate is of 93 % (as % of packaging weight).

Product Environmental Profile

Lighting outlet position with 2-way switch Living Now series



INSTALLATION

For the installation of the product, only standard tools are needed.



USE

Under normal conditions of use, this product requires no servicing, no maintenance or additional products.



END OF LIFE

The product end-of-life factors are taken into account during the design phase. Dismantling and sorting of components or materials is made as easy as possible with a view to recycling or failing that, another form of reuse. This product falls within the scope of the WEEE directive (2012/19/EU). Therefore it must be processed through local WEEE recycling/recovery channels.

• Extended producer responsibility:

The sale of this product is subject to a contribution to eco-organisations in each country responsible for managing end-of-life products in the field of application of the European Waste Electronic and Electrical Equipment Directive.

• Recyclability rate of the Reference Product:

Calculated using the method described in technical report IEC/TR 62635, the recyclability rate of the product is estimated at 92 %. This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for the end of life of this product.

Separated into:

- plastic materials (excluding packaging) : 36 %
- metal materials (excluding packaging) : 6 %
- packaging (all types of materials) : 50 %

• Recyclability rate of the lighting outlet positions with zamak cover plates:

Calculated using the method described in technical report IEC/TR 62635, the recyclability rate of the product is estimated at 94 %. This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for the end of life of this product.

Separated into:

- plastic materials (excluding packaging) : 25 %
- metal materials (excluding packaging) : 30 %
- packaging (all types of materials) : 39 %



ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from products marketed and used in Europe, in compliance with the local current standards.

For each phase, the following modelling elements were taken in account:

Manufacture	Materials and components of the product, all transport for the manufacturing, the packaging and the waste generated by the manufacturing.
Distribution	Transport between the last Group distribution centre and an average delivery point in the sales area.
Installation	The end of life of the packaging.
Use	<ul style="list-style-type: none"> • Product category: PSR 0005-ed2-2016 03 29, § 3.5 - Switches. • Use scenario: non-continuous operation for 20 years at 50% of rated load, during 30% of the time. This modelling duration does not constitute a minimum durability requirement. • Energy model: Electricity Mix, Europe 27 - 2008.
End of life	The default end of life scenario maximizing the impacts.
Software and database used	EIME V5 and its database «CODDE-2018-11»

Product Environmental Profile

Lighting outlet position with 2-way switch Living Now series



SELECTION OF ENVIRONMENTAL IMPACTS

	Total for Life cycle		Raw material and manufacture		Distribution		Installation		Use		End of life	
	Value	Unit	Value	%	Value	%	Value	%	Value	%	Value	%
Global warming	3.57E+00	kgCO ₂ eq.	1.23E+00	34%	8.14E-03	< 1%	6.54E-03	< 1%	2.32E+00	65%	1.10E-02	< 1%
Ozone depletion	8.13E-07	kgCFC-11 eq.	6.61E-07	81%	1.65E-11	< 1%	4.14E-11	< 1%	1.51E-07	19%	2.65E-10	< 1%
Acidification of soils and water	1.14E-02	kgSO ₂ eq.	1.66E-03	15%	3.66E-05	< 1%	3.01E-05	< 1%	9.67E-03	85%	4.20E-05	< 1%
Water eutrophication	2.69E-03	kg(PO ₄) ³⁻ eq.	2.03E-03	75%	8.41E-06	< 1%	2.08E-05	< 1%	5.84E-04	22%	4.96E-05	2%
Photochemical ozone formation	8.17E-04	kgC ₂ H ₄ eq.	2.78E-04	34%	2.60E-06	< 1%	2.15E-06	< 1%	5.31E-04	65%	3.27E-06	< 1%
Depletion of abiotic resources - elements	5.47E-05	kgSb eq.	5.45E-05	100%	3.26E-10	< 1%	2.87E-10	< 1%	2.01E-07	< 1%	6.88E-10	< 1%
Total use of primary energy	6.74E+01	MJ	2.07E+01	31%	1.15E-01	< 1%	8.94E-02	< 1%	4.63E+01	69%	1.21E-01	< 1%
Net use of fresh water	8.47E+00	m ³	6.52E-02	< 1%	7.29E-07	< 1%	1.71E-06	< 1%	8.40E+00	99%	9.17E-06	< 1%
Depletion of abiotic resources - fossil fuels	3.95E+01	MJ	1.29E+01	33%	1.14E-01	< 1%	8.72E-02	< 1%	2.63E+01	67%	1.09E-01	< 1%
Water pollution	3.53E+02	m ³	2.54E+02	72%	1.34E+00	< 1%	1.02E+00	< 1%	9.56E+01	27%	1.26E+00	< 1%
Air pollution	2.67E+02	m ³	1.65E+02	62%	3.34E-01	< 1%	5.57E-01	< 1%	9.98E+01	37%	1.25E+00	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

The environmental impacts are calculated for a configuration composed by 2-way switch with cover, support and cover plate.

For products covered by the PEP other than the Reference Product, to obtain the environmental impacts of each phase of the lifecycle:

- for the configurations with different finishing and different plastic cover plates, the environmental impacts take the same values of those of the Reference Product;

- for the configurations with 1-way switch, multiply the environmental impacts of the Reference Product by the following coefficients:

Total	Manufacturing	Distribution	Installation	Use	End of life
1,0	1,0	1,0	1,0	1,1	1,0

- for the configurations with zamak cover plates, multiply the environmental impacts of the Reference Product by the following coefficients:

Total			Manufacturing			Distribution	Installation	Use	End of life
Depl. of abiotic resources - elements	Air pollution	Other indicators	Depl. of abiotic resources - elements	Air pollution	Other indicators	All indicators	All indicators	All indicators	All indicators
1,9	3,0	1,1	1,9	4,2	1,3	1,3	1,0	1,0	1,2

Registration N°: LGRP-01357-V01.01-EN	Drafting rules: PEP-PCR-ed3-EN-2015 04 02 Supplemented by PSR-0005-ed2-2016 03 29
Verifier accreditation N°: VH02	Information and reference documents : www.pep-ecopassport.org
Date of issue: 06-2021	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010 Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)	
PEP are compliant with XP C08-100-1 : 2016 The elements of the present PEP cannot be compared with elements from another program	
Document in compliance with ISO 14025 : 2010: «Environmental labels and declarations. Type III environmental declarations»	
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013	

