


# Concord

## MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ 2058872

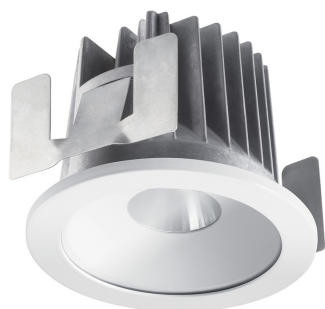

### Features

- MYRD IP FL 3K PHDM WHT WBEZ

### Product Overview

Product name	MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
E-number FI	4277683
Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP65/20

# Concord

## MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ 2058872

**IK rating**

IK02


**Product EAN number**

5025768588725


**Warranty**

5 years

### Photometry

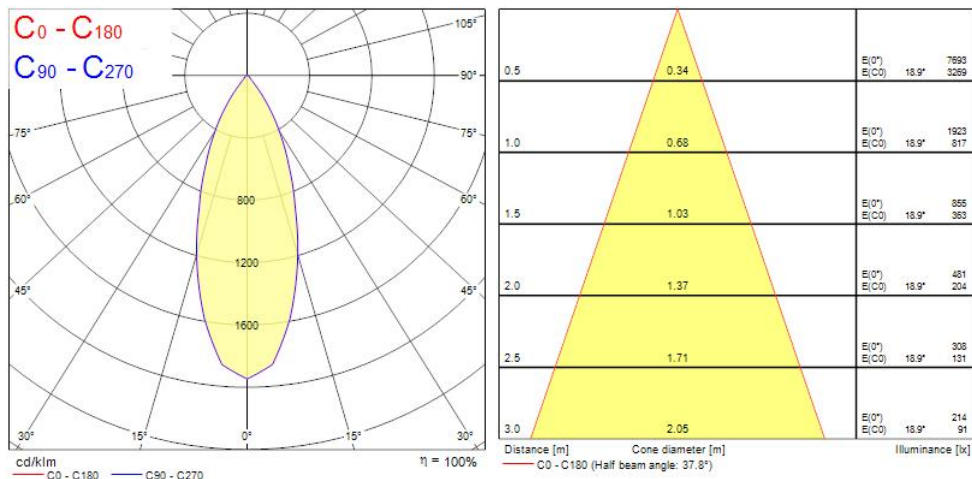

### Technical drawings

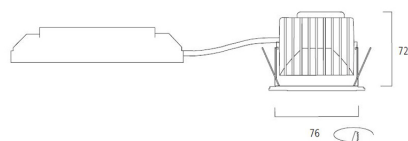

Dimensions (mm)

### Data table

# Concord

## MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ 2058872

### GENERAL DATA

Product name	MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Performance ambient temperature Tq (°C)	25
E-number FI	4277683
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E

# Concord

## MYRIAD DECO IP65 FLOOD 3000K PHDM WHITE WBEZ 2058872

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### PHYSICAL DATA

Housing colour	White
IP rating	IP65/20
IK rating	IK02
Diffuser finish	Bezel (or Ring)
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

### PACKAGING

Single packaging type	Carton
Product EAN number	5025768588725
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768588725
Packaging outer length / height (cm)	17.5

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No