


Start Surface IP66 Ø350mm Emergency

START SURFACE IP66 1500LM 840 EM3 IK10 WHT
0049009



Product features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 17W max. power consumption, 88lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated emergency, 3 hours, supplied with anti-theft screws

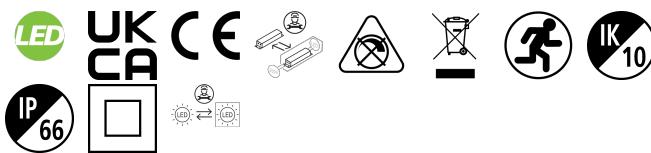


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1500LM 840 EM3 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	1500
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
LOR (%)	100
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490090

Start Surface IP66 Ø350mm Emergency *START SURFACE IP66 1500LM 840 EM3 IK10 WHT* 0049009

PHOTOMETRY

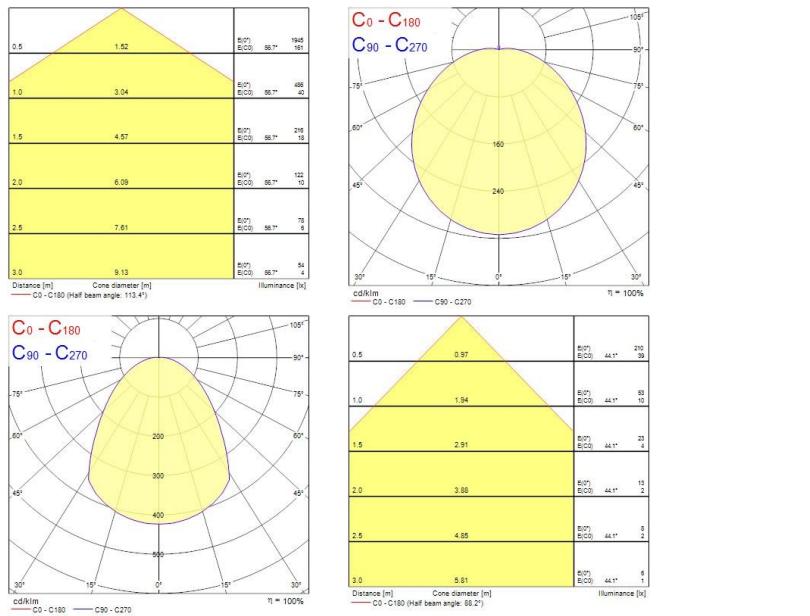

TECHNICAL DRAWINGS

