

# Product data sheet Spirotech

## Product name

**SpiroTrap MBC -1" -Magnet -Uni**

## Product properties

A small brass dirt separator with magnet and a 22 mm - 1" universal connection


## Article number

**UE100WH**

## Product image



## Product dimensions

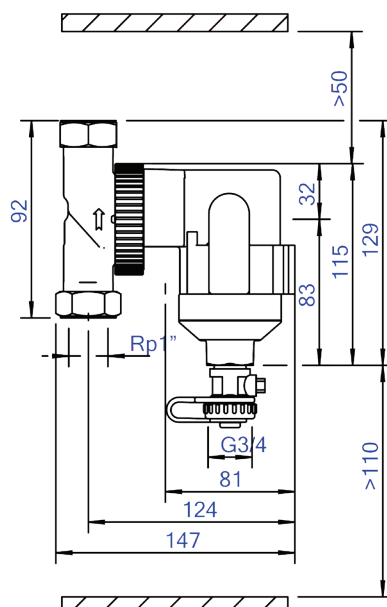

# Product data sheet Spirotech

## ETIM product data

|                                      |                                                            |
|--------------------------------------|------------------------------------------------------------|
| Housing material                     | Brass                                                      |
| With drain valve                     | Yes                                                        |
| Housing material quality             | Other                                                      |
| Backwash filter                      | No                                                         |
| Max. operating pressure              | 10 bar                                                     |
| KVS value [m3/h] at $\Delta P$ 1 bar | 12.17                                                      |
| Variable flow direction              | Yes                                                        |
| With insulation                      | No                                                         |
| Separator type                       | Dirt                                                       |
| Connection                           | Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1) |
| Model                                | Horizontal/vertical                                        |
| Nominal diameter                     | Other                                                      |
| Max. glycol mixture                  | 50 %                                                       |
| Suitable for heating                 | Yes                                                        |
| Suitable for cooling                 | Yes                                                        |
| Construction length                  | 100 mm                                                     |
| Article compression class            | PN 10                                                      |
| Surface protection                   | Untreated                                                  |
| Suitable for open system             | No                                                         |

|                                       |          |
|---------------------------------------|----------|
| Suitable for closed system            | Yes      |
| Suitable for solar                    | No       |
| Whirl operating principle             | No       |
| Negative pressure operating principle | No       |
| With dismountable filter              | No       |
| Filter volume                         | 0.39 l   |
| Magnet operating principle            | Yes      |
| Thrust operating principle            | No       |
| With automatic de-aerator             | No       |
| Partial flow principle                | No       |
| Principle full flow with settling     | Yes      |
| With integrated replenishment automat | No       |
| With couplers                         | Yes      |
| Cleaning possible during operation    | Yes      |
| Material of connection                | Brass    |
| Inlet/outlet offset distance          | 0 mm     |
| Material quality connection           | Other    |
| Operating principle                   | Magnet   |
| Magnet location                       | External |

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

