



ENERG


енергия · ενεργεια




10066842

alpha innotec

WZS 102K3M

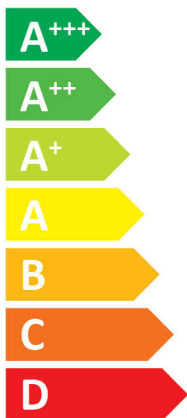

A++

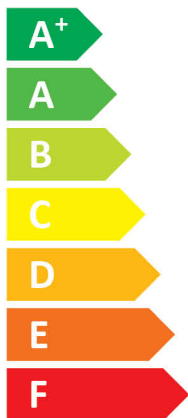

A

Two icons showing sound power level: a speaker inside a house with the value 44 dB, and a speaker outside a house with the value - dB.



- 9 kW
- 10kW**
- 10 kW

An icon showing a clock face and a stack of coins with an arrow pointing to it, representing energy efficiency and cost.




ENERGY


10066842

alpha innotec

WZS 102K3M

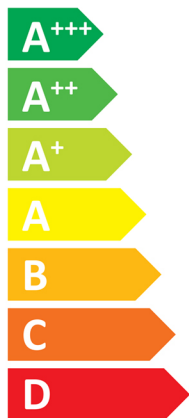

A++

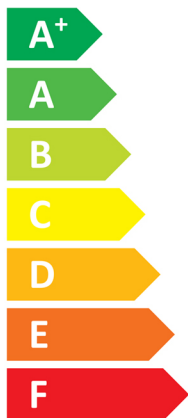

A

Two icons of a house with sound waves. The top icon is labeled "44 dB" and the bottom icon is labeled "- dB".



- 9 kW
- 10kW**
- 10 kW

An icon showing a clock face with a dashed line and a stack of coins with an arrow pointing down, representing time and cost.



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

10066842

alpha innotec

WZS 102K3M + Luxtronik 2.1

Energy label for heating system components. It shows a radiator icon with an **A⁺⁺** rating, a boiler icon with an **A** rating, and a tap icon with an **XL** rating.

Energy scale for heating system components. The scale ranges from **A⁺⁺⁺** (green) to **G** (red). A large black arrow on the right points to the **A⁺⁺** rating.

Energy label for additional features. It shows four features, each with a plus sign and a square box:

- Solar panel icon:
- Water tank icon:
- Control panel icon:
- Boiler icon:

Energy scale for additional features. The scale ranges from **A⁺⁺⁺** (green) to **G** (red). A large black arrow on the right points to the **A** rating.

package (heat pumps and combination heater with heat pump) WZS 102K3M + Luxtronik 2.1

Seasonal space heating energy efficiency of heat pump (η_s)

① 143 %

Rated heat output of the heat pump (P_{rated} kW)

10

Temperature control

Class

VII (Table 1)

+

② 3,5 %

Supplementary boiler

package with hot water storage tank

no

P_{sup} kW (rated heat output of supplementary heater)

η_s % (σ_{sup})

$(\eta_s \% (sup) - ①) \times (\alpha_{WP}) = -$ ③ %

(α_{WE} : see Table 3)

(α_{WE})

solar contribution

(A_{Koll} m²)

(η_{Koll} %)

(V_{Sp} m³)

(standstill heat loss of the hot water storage tank in W)

(η_{Sp} : Table 2)


$((294/P_{rated} \times 11) \times (A_{Koll} \text{ m}^2) + (115/P_{rated} \times 11) \times (V_{Sp} \text{ m}^3)) \times 0,45 \times ((\eta_{Koll} \%) / 100) \times (\eta_{Sp}) = +$ ④ %

Seasonal space heating energy efficiency of package

⑤ 146 %

rounded to the nearest integer

Seasonal space heating energy efficiency class of package

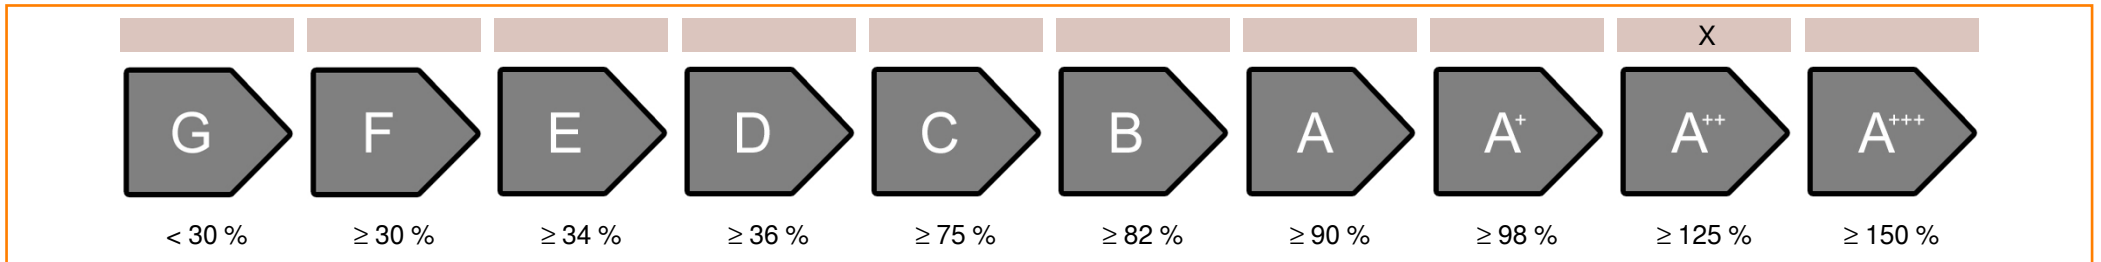

Seasonal space heating energy efficiency under colder or warmer climate conditions

Seasonal space heating energy efficiency of the heat pump (η_s) under colder climate conditions

148 %

Seasonal space heating energy efficiency of the heat pump (η_s) under warmer climate conditions

143 %

colder ⑤ 146 -V -6 = 152 warmer ⑤ 146 +VI 1 = 147

heatpump datasheet:			
manufacturer:	alpha innotec		
model:	WZS 102K3M		
Information concerning energy efficiency class and rated heat output:			
load profile water heating	XL		-
	average / low	average / medium	
energy efficiency class space heater:	A+++	A++	-
energy efficiency class waterheating	A		-
rated heat output:	11	10	kW
annual final energy consumption space heater	3934	5241	kWh
annual electricity consumption waterheating	1551		kWh
energy efficiency space heater:	214	143	%
energy efficiency waterheating	108		%
sound power level indoors	44		dB
special precautions concerning assembly, installation or maintenance			
All instructional work in this manual may only be carried out by qualified specialist personnel in compliance with local regulations.			
additional information	low	medium	
rated heat output colder climate	11	9	kW
rated heat output warmer climate	11	10	kW
annual energy consumption space heater colder climate	4478	5980	kWh
annual energy consumption space heater warmer climate	2619	3497	kWh
ann. Electricity consumption waterheating colder climate	1551		kWh
ann. Electricity consumption waterheating warmer climate	1551		kWh
energy efficiency space heater colder climate	223	148	%
energy efficiency space heater warmer climate	215	143	%
energy efficiency waterheating colder climate	108		%
energy efficiency DHWwarmer climate	108		%
sound power level outdoors	-		dB

technical data of the temperature controller		
manufacturer:	alpha innotec	
model:	Luxtronik 2.1	
controller class	VII	-
contribution of the controller to the energy efficiency space heater	3,5	%

Model				WZS 102K3M			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				medium			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	10	kW	Seasonal space heating energy efficiency	η_S	142,7	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	8,5	kW	Tj = -7°C	COPd	3,05	-
Tj = +2°C	Pdh	8,9	kW	Tj = +2°C	COPd	3,76	-
Tj = +7°C	Pdh	9,1	kW	Tj = +7°C	COPd	4,35	-
Tj = +12°C	Pdh	9,4	kW	Tj = +12°C	COPd	5,09	-
Tj = bivalent temperature	Pdh	8,5	kW	Tj = bivalent temperature	COPd	3,05	-
Tj = operation limit temperature	Pdh	8,3	kW	Tj = operation limit temperature	COPd	2,82	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,015	kW	Rated heat output	P _{sup}	1,3	kW
Thermostat-off mode	P _{TO}	0,015	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,015	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	108	%
Daily electricity consumption	Q _{elec}	7,063	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Model				WZS 102K3M			
Air-to-water heat pump: (yes/no)				no			
Brine-to-water heat pump: (yes/no)				yes			
Water-to-water heat pump: (yes/no)				no			
Low-temperature heat pump: (yes/no)				no			
Equipped with supplementary heater: (yes/no)				yes			
combination heater with: (yes/no)				yes			
application: (low/medium)				low			
climate: (colder/average/warmer)				average			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output	Prated	11	kW	Seasonal space heating energy efficiency	η_S	214,2	%
Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj				Declared coefficient of performance for part load at indoor temperature 20°C and outdoor temperature Tj			
Tj = -7°C	Pdh	9,4	kW	Tj = -7°C	COPd	5,23	-
Tj = +2°C	Pdh	9,5	kW	Tj = +2°C	COPd	5,63	-
Tj = +7°C	Pdh	9,6	kW	Tj = +7°C	COPd	6,05	-
Tj = +12°C	Pdh	9,7	kW	Tj = +12°C	COPd	6,52	-
Tj = bivalent temperature	Pdh	9,4	kW	Tj = bivalent temperature	COPd	5,23	-
Tj = operation limit temperature	Pdh	9,3	kW	Tj = operation limit temperature	COPd	5,05	-
For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C (if TOL < -20°C)	COPd	-	-
Bivalent temperature	T _{biv}	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	1,0	-	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0,015	kW	Rated heat output	P _{sup}	1,3	kW
Thermostat-off mode	P _{TO}	0,015	kW	Type of energy input	electrical		
Standby mode	P _{SB}	0,015	kW				
Crankcase heater mode	P _{CK}	-	kW				
Other items							
Capacity control	fixed			For air-to-water heat pumps: Rated air flow rate, outdoors	-	-	m ³ /h
sound power level, indoors/outdoors	L _{WA}	44 / -	dB	For water-/brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	2	m ³ /h
Emissions of nitrogen oxides	NO _x	-	mg/kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Contact details	ait deutschland GmbH Industriestr. 3 95359 Kasendorf Germany						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							