

## Myriad Adjustable Round - White with White bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ  
2058029



### PRODUCT OVERVIEW

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Warranty	5 years
Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580293

### DATA TABLE

#### General data

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
Warranty	5 years

## Myriad Adjustable Round - White with White bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ  
2058029

### Optical data

Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

### Packaging

Single packaging type	Carton
Product EAN number	5025768580293
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580293
Packaging outer length / height (cm)	17.5


## PHOTOMETRY

## Myriad Adjustable Round - White with White bezel MYRIAD ADJ ROUND WHITE 2700K PHDIM WHITE BZ 2058029

0.5	0.23	E(0°) E(C0)	10999 4705
1.0	0.47	E(0°) E(C0)	2525 1175
1.5	0.70	E(0°) E(C0)	1122 523
2.0	0.94	E(0°) E(C0)	631 294
2.5	1.17	E(0°) E(C0)	424 198
3.0	1.41	E(0°) E(C0)	281 131

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 26.4°)

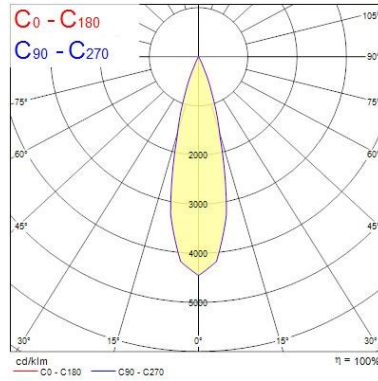

### TECHNICAL DRAWINGS

