




Features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 19350lm, 150W, 129lm/W, CRI80, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L80B20 lifespan, 451 x 330 x 77mm (LxWxD) dimensions, 4.6kg weight.


Product Overview

Product name	Kalani IP66 20KLM 830 ASYM
Technology	LED
Cap/Base	N/A
E-number FI	4579560
Fixture luminous flux (lm)	19350
Luminaire efficacy (lm/W)	129
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65*120
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485294
Warranty	5 years

Photometry

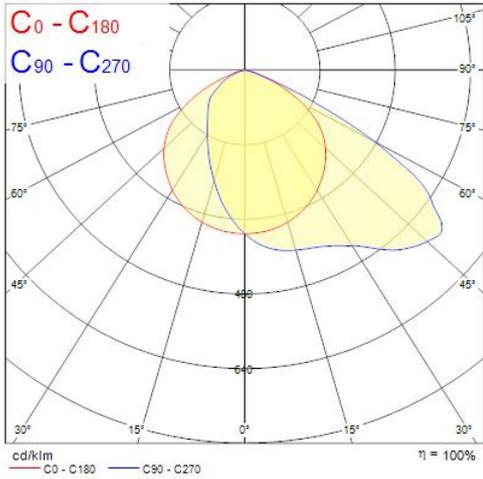

Technical drawings

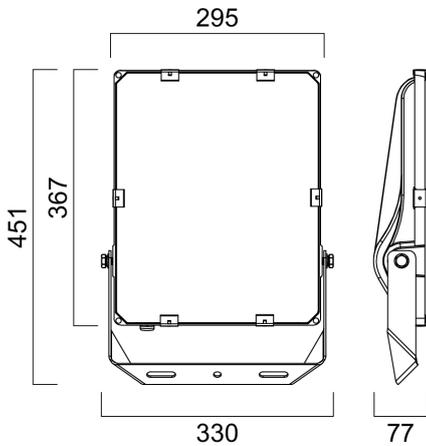

Data table

GENERAL DATA

Product name

Kalani IP66 20KLM 830 ASYM

Kalani IP66 20KLM 830 ASYM 0048529

Technology	LED
Cap/Base	N/A
Performance ambient temperature Tq (°C)	25
E-number FI	4579560
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	19350
Luminaire efficacy (lm/W)	129
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65*120
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	150
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.99
Electrical protection	Class I
Control gear required	No
Drive current (mA)	2850
Inrush Current (A)	60
Inrush Duration (µs)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	4
Max. products per 20A B Breaker	5
Mains surge immunity (differential mode -> L-N) (kV)	6

Kalani IP66 20KLM 830 ASYM 0048529

Mains surge immunity (common mode -> L/N - GND) (kV)	10
--	----

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000

PHYSICAL DATA

IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	451
Nominal Product Width (mm)	330
Weight (kg)	4.6

PACKAGING

Single packaging type	Carton
Product EAN number	5410288485294
Packaging single width (cm)	13.0
Packaging single depth (cm)	37.0
DUN14 (outer)	05410288485294
Packaging outer length / height (cm)	52.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No