




### Features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 19350lm, 150W, 129lm/W, CRI80, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L80B20 lifespan, 451 x 330 x 77mm (LxWxD) dimensions, 4.6kg weight.

### Product Overview

Product name	Kalani IP66 20KLM 830 ASYM
Technology	LED
Cap/Base	N/A
E-number FI	4579560
Fixture luminous flux (lm)	19350
Luminaire efficacy (lm/W)	129
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65*120
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288485294
Warranty	5 years

## Photometry

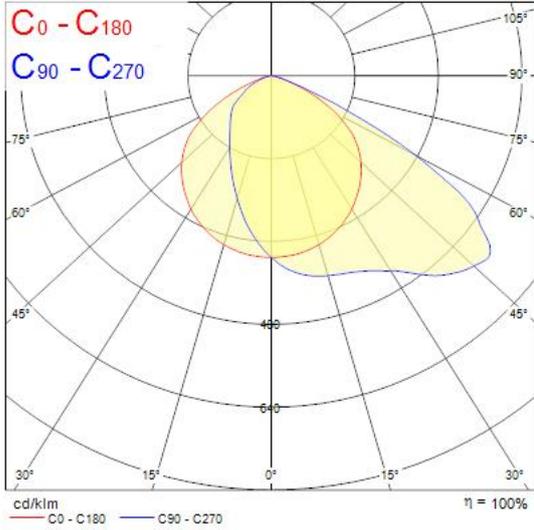

## Technical drawings

