


INSTAR TREND SW IP44 INDOOR BA

Item No: 3079061

SYLVANIA

PRO

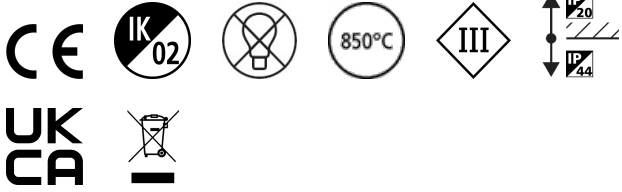

INSTAR TREND SW IP44 INDOOR BA


Technical Assets

Photometrics

0.5	0.07	E:07 E:03	4.1° 4.1°	1605 833
1.0	0.14	E:07 E:03	4.1° 4.1°	404 206
1.5	0.22	E:07 E:03	4.1° 4.1°	181 92
2.0	0.29	E:07 E:03	4.1° 4.1°	104 53
2.5	0.36	E:07 E:03	4.1° 4.1°	66 32
3.0	0.43	E:07 E:03	4.1° 4.1°	43 21

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 9.2°)



INSTAR TREND SW IP44 INDOOR BA

Item No: 3079061

SYLVANIA

General data

Product name	INSTAR TREND SW IP44 INDOOR BA
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274924
E-number SE	7461924
E-number Norway	3223416
Warranty	3 years

Optical data

LOR (%)	Dependent on lamp
Adjustable chromaticity	N
Distribution type	Adjustable

Electrical data

Light source included	Fixture without Lightsource
Primary Supply/Product voltage - min (V)	12
Primary Supply/Product voltage - max (V)	12
Electrical protection	Class III
Control gear mounting	Remote
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK02
Max. Lamp Diameter (mm) - D	95
Weight (kg)	0.155
Recessed Depth (mm)	90

Packaging

Product EAN number	8711971790617
Packaging single length / height (cm)	13.2
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.4
DUN14 (inner)	18711971790614
Units per outer package	30
Packaging outer length / height (cm)	28.4
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	53.2

Safety data

Glow Wire Test (°C)	850
---------------------	-----