


Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR BA 3079061



Product features


- INSTAR TREND SW IP44 INDOOR BA




PRODUCT OVERVIEW

Product name	INSTAR TREND SW IP44 INDOOR BA
Technology	Accessory
Cap/Base	GX5.3
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4274924
E-number SE	7461924
E-number Norway	3223416
Warranty	3 years
LOR (%)	Dependent on lamp
Light source included	Fixture without Lightsource
Electrical protection	Class III
Control gear mounting	Remote
Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971790617

PHOTOMETRY

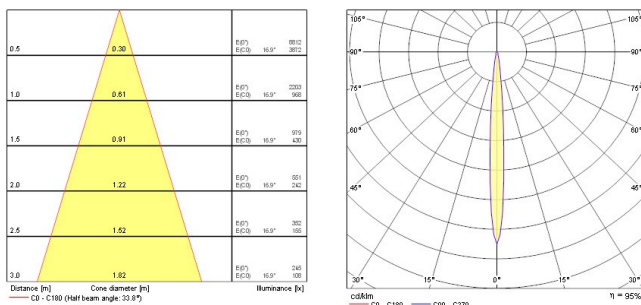

Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR BA 3079061

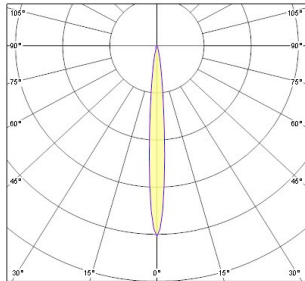


Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.07	9905	9905
1.0	0.14	4954	4954
1.5	0.22	3301	3301
2.0	0.29	2475	2475
2.5	0.36	1980	1980
3.0	0.43	1500	1500

Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.30	2096	1396
1.0	0.60	524	324
1.5	0.91	233	144
2.0	1.21	135	84
2.5	1.51	88	54
3.0	1.81	62	39

Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.32	2024	1276
1.0	0.65	506	319
1.5	0.97	277	174
2.0	1.30	167	104
2.5	1.62	112	70
3.0	1.95	80	50


Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.21	1807	1216
1.0	0.42	452	304
1.5	0.64	301	203
2.0	0.86	226	152
2.5	1.07	181	122
3.0	1.29	151	102

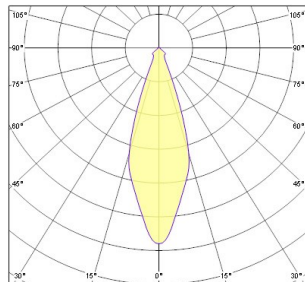

Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.08	2434	1584
1.0	0.16	608	396
1.5	0.24	412	264
2.0	0.31	317	198
2.5	0.39	254	158
3.0	0.47	216	138

Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.07	4206	2436
1.0	0.15	1051	609
1.5	0.22	562	336
2.0	0.29	391	228
2.5	0.37	301	180
3.0	0.44	256	150

Distance [m]	Cone diameter [m]	E ₇₀ [lx]	E ₅₀ [lx]
0.5	0.55	2946	1926
1.0	1.10	736	481
1.5	1.65	504	331
2.0	2.20	378	248
2.5	2.75	302	198
3.0	3.30	256	168

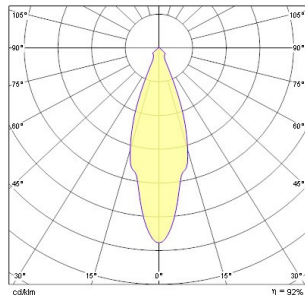

Instar Trend 75 Swing IP44 INSTAR TREND SW IP44 INDOOR BA 3079061

