



## Features

- ToLEDo R7s is a retrofit replacement for traditional halogen double-ended linear R7s lamps. The slim design and glass construction give the same look and feel of traditional halogen R7s lamp. Omni-directional light distribution. High lumen efficacy. Lumen output: 850lm. 85% energy saving. Length: 118mm. Non-Dimmable. 15,000 hours average rated life. Ideal for domestic and commercial applications.


## Product Overview

Product name	ToLEDo R7S V2 118MM DIM 1055LM 827 SL
Technology	LED
Lamp shape	Capsule
Cap/Base	R7s
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	320
Photobiological Risk Group	RG1
Wattage (W)	9.4
Power consumption (W)	9.4
Control gear type	LED driver constant current
Dimmable	Yes

## ToLEDo R7S V2 118MM DIM 1055LM 827 SL 0030776

Housing colour	Transparent
IP rating	IP20
Product EAN number	5410288307763
Warranty	3 years
Dimming method	Mains: leading / trailing edge
Useful luminous flux (#use)	1055

### Technical drawings

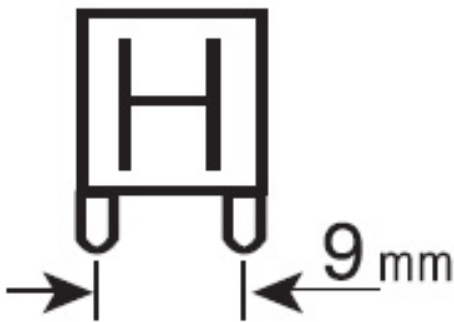

### Data table

#### GENERAL DATA

Product name	ToLEDo R7S V2 118MM DIM 1055LM 827 SL
Technology	LED
Lamp shape	Capsule
Cap/Base	R7s
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
Warranty	3 years

#### OPTICAL DATA

## ToLEDo R7S V2 118MM DIM 1055LM 827 SL 0030776

Useful luminous flux (#use)	1055
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	320
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Power consumption (W)	9.4
Wattage (W)	9.4
Equivalent watt (W)	75
Current (A)	0.068
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Inrush Current (A)	6.72
Inrush Duration (µs)	284
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

### PHYSICAL DATA

Housing colour	Transparent
IP rating	IP20
Nominal Product Height (mm)	78
Nominal Product Diameter (mm)	18

ToLEDo R7S V2 118MM DIM 1055LM 827 SL  
0030776

Weight (kg)	0.039
-------------	-------

## PACKAGING

Product EAN number	5410288307763
Packaging single length / height (cm)	11.8
Packaging single width (cm)	2.15
Packaging single depth (cm)	2.15
DUN14 (inner)	15410288307760
Units per outer package	6
Packaging outer length / height (cm)	15.5
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	14.0

## SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo R7S V2 118MM DIM 1055LM 827 SL  
0030776

## Energy label



0030776



**10**  
kWh/1000h



2019/2015



0030776



**10**  
kWh/1000h



2019/2015